





# Caledonian

Industrial Cables (Spanish Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## RZ1-K(AS)

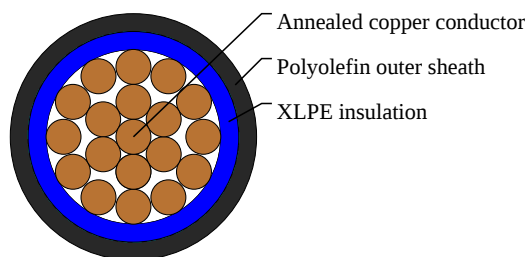

## APPLICATIONS

These cables with zero halogen are high security cables. In case of fire, they do not emit toxic or corrosive gases, thereby protecting public health and avoiding any possible damage to electronic equipment. For this reason, its use is recommended in public places such as: hospitals, schools, museums, airports, bus terminals, shops in general, tunnels, the underground, etc., as well as in calculation centres, offices, production plants, laboratories, etc.

## STANDARDS

UNE 21123, EN 60332, EN 60332-1, EN 50266

EN 50267-1, EN 50267-2, EN 61034, IEC 60332-1

IEC 60332-3, IEC 60754-1, IEC 60754-2, IEC 61034, IEC 60331

## VOLTAGE RATING

600/1000 V

## CABLE CONSTRUCTION

- Flexible electrolytic annealed copper conductor
- Class 5 in accordance with IEC 60228
- XLPE insulation type DIX 3 according to HD 603
- LOSH polyolephine outer sheath according to UNE 21123

## COLOUR CODE

Insulation Colour Code

Color coded to HD 308

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts
- Minimum bending radius:  $10 \times \varnothing$
- Working temperature:  $-15^{\circ}\text{C}$  to  $+90^{\circ}\text{C}$
- Short circuit temperature:  $+250^{\circ}\text{C}$
- Insulation resistance:  $20\text{ M}\Omega \times \text{km}$
- Halogen free: IEC 60754-1, EN 50267-2-1



# Caledonian

Industrial Cables (Spanish Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- No corrosive gases: IEC 60754-2, EN 50267-2-2
- No toxic gases: NES 02-713, NF X 70-100
- Low smoke density: IEC 61034, EN 50268-2
- Flame retardant: IEC 60332-1, EN 50265-2-1
- Non-flame propagating: IEC 60332-3, EN 50266-2

## DIMENSION AND PARAMETERS

| No. of Cores ×<br>Cross-sectional Area | AWG Size    | Approx. Overall Diameter | Approx. Weight |
|----------------------------------------|-------------|--------------------------|----------------|
| No.×mm <sup>2</sup>                    |             | mm                       | kg/km          |
| 1x70                                   | 2/0(356/24) | 15.9                     | 716            |