





Caledonian

Industrial Cables (Australian Standard Low Voltage)

www.caledonian-cables.com

marketing@caledonian-cables.com

V75 PVC Ordinary Duty Flexible Cord, 250/400V

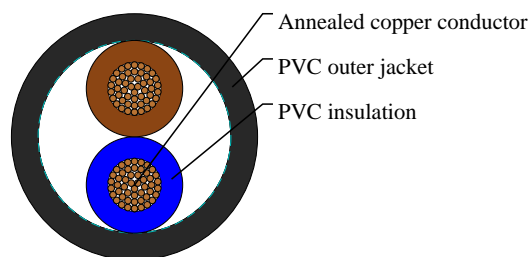

APPLICATIONS

These cables are suitable for installation in dry applications only, in conduit or enclosures, such as switchboards, control panels, appliances and electrical equipment. such as radios, desk lamps and office machines, etc. Also they are used for extension leads in sizes 1 mm² and above. Multicore cords containing an E core are suitable for a number of applications in dry and damp conditions, such as domestic appliances (washing machines, dishwashers). Leads for industrial and office equipment requiring a three-phase supply and an earth connection.

STANDARDS

AS/NZS 3191

AS/NZS 1125

VOLTAGE RATING

250/400V

CABLE CONSTRUCTION

Conductor: Annealed copper conductor to AS/NZS 1125

Maximum continuous operating temperature: 75°C

Insulation: V-75 PVC

Sheath: 4V-75 PVC

COLOUR CODE

Insulation Colours: Brown, Light Blue

Sheath Colours: Grey, White, Black, Orange

TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Current Carrying Capacity	Maximum DC Resistance @20°C	Maximum AC Resistance @90°C	Single Phase Voltage Drop
mm ²	A	Ohm/km	Ohm/km	mV/A/m
2.5	20	7.98	9.70	19.4

DIMENSION AND PARAMETERS



Caledonian

Industrial Cables (Australian Standard Low Voltage)

www.caledonian-cables.com

marketing@caledonian-cables.com

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight
No. × mm ²	mm	mm	mm	kg/km
2x2.5	0.8	1.0	9.4	14