




Caledonian

Industrial Cables (Australian Standard Medium Voltage)

www.caledonian-cables.com

marketing@caledonian-cables.com

12.7/22kV Single Core Screened & PVC Sheathed (Cu Conductor) Heavy Duty 1C50

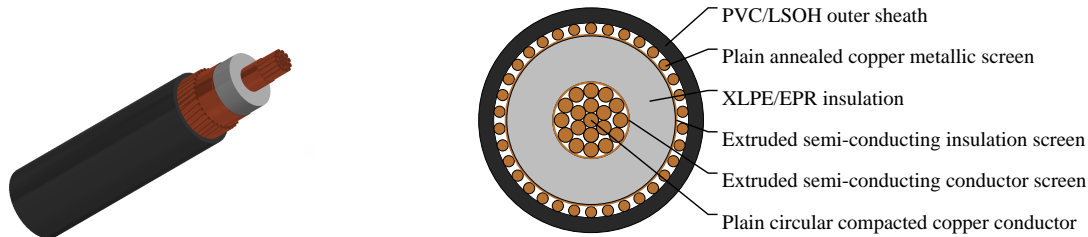

APPLICATIONS

These cables are designed to be used for the supply of electrical energy in fixed applications up to the rated voltages at a nominal power frequency between 49Hz and 61Hz., they are suitable for use in distribution installation, electrical power station , they are applied for installation, outdoors, underground where subject to mechanical damage.

STANDARDS

AS/NZS 1429.1

VOLTAGE RATING

12.7/22kV

CABLE CONSTRUCTION

CONDUCTOR: Plain circular compacted copper to AS/NZS1125

Maximum Continuous Operating Temperature: 90°C

CONDUCTOR SCREEN: Extruded semi-conducting compound, bonded to the insulation and applied in the same operation as the insulation

INSULATION: Cross Linked Polyethylene (XLPE) – standard

Ethylene Propylene Rubber (EPR) – alternative

INSULATION SCREEN: Extruded semi-conducting compound

METALLIC SCREEN: Plain annealed copper wire: 10kA for nominal 1 second(HEAVY DUTY)

SHEATH: Black 5V-90 polyvinyl chloride (PVC) – standard

Orange 5V-90 PVC inner plus black high density polyethylene (HDPE) outer – alternative

Low smoke zero halogen (LSOH) – alternative

TECHNICAL CHARACTERISTICS

NonMax. Conduc	Cond.	Cond.	Inductive	Inductive	Inductive	Insulation	Conductor	Max.	Current	Current	Current
Cross- Section Area	DC Resistan @20°C	AC Resistan @50Hz and 90°C (Trefoil spaced)	AC Resistan @50Hz and 90°C (flat touching spaced)	reactance @50Hz and 90°C (Trefoil touching)	reactance @50Hz and 90°C (flat touching)	reactance @50Hz and 90°C (flat spaced)	Resistanc @20°C to screen capacitanc	dielectric stress	Ratings (Unenclos In Air)	Ratings (Buried Direct)	Ratings (Buried In Ducts)



Caledonian

Industrial Cables (Australian Standard Medium Voltage)

www.caledonian-cables.com

marketing@caledonian-cables.com

		or Flat touching)										
mm ²	Ohm/ km	Ohm/ km	Ohm/ km	Ohm/ km	Ohm/ km	Ohm/Meg km	Ohm.k	μF × km	kV × mm	A	A	A
50	0.387	0.494	0.494	0.151	0.166	0.212	14000	0.171	3.48	244	216	187

DIMENSION AND PARAMETERS

Nominal Cross- sectional Area	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter over Insulation	Screen Area on Each core	No. Diameter of Screened Wires	Nom. Diameter Over Screened Wires	Nom. Overall Diameter	Approx. Weight
mm ²	mm	mm	mm	mm ²	no x mm	mm	mm	kg/km
50	8	5.5	20.3	20	36x0.85	21.4	27.6	112