




Caledonian

Industrial Cables (Australian Standard Medium Voltage)

www.caledonian-cables.com

marketing@caledonian-cables.com

3.8/6.6kV Three Core Individual Screened & PVC Sheathed (Cu Conductor) Light Duty 3C185

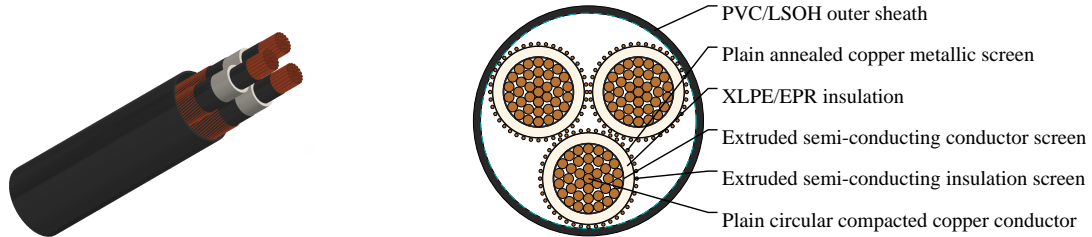

APPLICATIONS

These cables are designed to be used for the supply of electrical energy in fixed applications up to the rated voltages at a nominal power frequency between 49Hz and 61Hz., they are suitable for use in distribution installation, electrical power station , they are applied for installation, outdoors, underground where subject to mechanical damage.

STANDARDS

AS/NZS 1429.1

VOLTAGE RATING

3.8/6.6kV

CABLE CONSTRUCTION

CONDUCTOR: Plain circular compacted copper to AS/NZS1125

Maximum Continuous Operating Temperature: 90°C

CONDUCTOR SCREEN: Extruded semi-conducting compound, bonded to the insulation and applied in the same operation as the insulation

INSULATION: Cross Linked Polyethylene (XLPE) – standard

Ethylene Propylene Rubber (EPR) – alternative

INSULATION SCREEN: Extruded semi-conducting compound

METALLIC SCREEN: Plain annealed copper wire: 3kA for nominal 1 second(LIGHT DUTY)

SHEATH: Black 5V-90 polyvinyl chloride (PVC) – standard

Orange 5V-90 PVC inner plus black high density polyethylene (HDPE) outer – alternative

Low smoke zero halogen (LSOH) – alternative

TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Max. Conduct DC Resistance @20°C	Cond. AC Resistance @50Hz and 90°C	Inductive reactance @50Hz	Insulation Resistance @20°C	Conductor to screen capacitance	Max. dielectric stress	Current Ratings (Unenclosed In Air)	Current Ratings (Buried Direct)	Current Ratings (Buried In Ducts)
mm ²	Ohm/km	Ohm/km	Ohm/km	MegOhm.km	µF × km	kV × mm	A	A	A
185	0.0991	0.128	0.0917	4600	0.53	1.69	426	436	373



Caledonian

Industrial Cables (Australian Standard Medium Voltage)

www.caledonian-cables.com

marketing@caledonian-cables.com

DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter over Insulation	Screen Area on Each core	Nom. Diameter Over Screened Wires	Nom. Overall Diameter	Approx. Weight
mm ²	mm	mm	mm	mm ²	mm	mm	kg/km
185	16.1	2.5	22.2	10.2	23.5	60.1	669