





Caledonian

Industrial Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

H05V-K

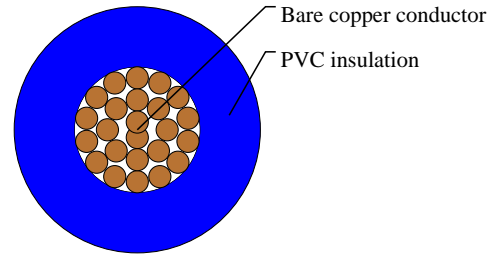

APPLICATIONS

These insulated wires are determined for installation to the inside of apparatus as well as for the protective laying to the lightings, in dry rooms, in production facilities, switch and distributors boards, in tubes, under and surface mounting of plasters.

STANDARDS

NF C 32-201-3

ROHS compliant

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Special PVC TI1 core insulation
- Cores to VDE-0293 colors on chart

COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293-308/HD308/NF C 32-081

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts
- Flexing bending radius: $12.5 \times \varnothing$
- Static bending radius: $12.5 \times \varnothing$
- Flexing temperature: -5°C to $+70^{\circ}\text{C}$
- Static temperature: -30°C to $+80^{\circ}\text{C}$
- Flame retardant: NF C 32-070
- Insulation resistance: $10\text{ M}\Omega \times \text{km}$

DIMENSION AND PARAMETERS



Caledonian

Industrial Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

| No. of Cores × Cross- sectional Area | AWG Size | Nominal Insulation Thickness | Approx. Overall Diameter | Nominal Copper Weight | Approx. Weight |
|--|-----------|------------------------------------|-----------------------------|--------------------------|----------------|
| No.×mm ² | | mm | mm | kg/km | kg/km |
| 1 x 0.75 | 18(24/32) | 0.6 | 2.4 | 7.2 | 13 |