




# Caledonian

Industrial Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

## H05VVC4V5-K

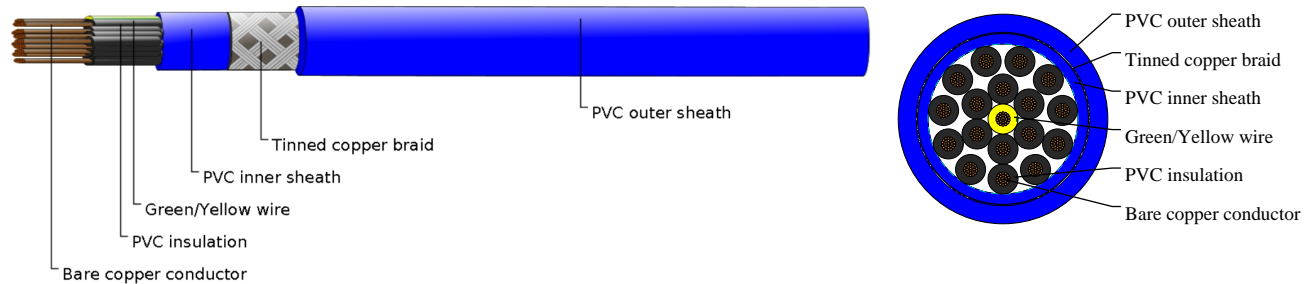

## APPLICATIONS

These cables are suitable for dry, damp and wet locations but not in the open-air. They are used as screened termination and connection cable in the control, measuring and signal technology. The copper braiding optimises protection against external interferences, like electromagnetic fields and stray frequencies. Suitable as a signal and impulse cable for control and inspection of industrial plants, machinery and working processes.

## STANDARDS

NF C 32-201-13

## VOLTAGE RATING

300/500V

## CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- PVC insulation T12 to DIN VDE 0281 part 1
- Green-yellow grounding (3 conductors and above)
- Cores to VDE-0293 colors
- PVC inner sheath TM2 to DIN VDE 0281 part 1
- Tinned copper braided shielding, covering approx. 85%
- PVC outer jacket TM5 to DIN VDE 0281 part 1

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE-0293

- Green-Yellow+ Black numbered

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000volts
- Flexing bending radius: 10 x Ø
- Static bending radius: 5 x Ø
- Flexing temperature: -5° C to +70° C



# Caledonian

Industrial Cables (French Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Static temperature: -40° C to +70° C
- Flame retardant: NF C 32-070
- Insulation resistance: 20 MΩ x km

## DIMENSION AND PARAMETERS

| No. of Cores<br>× Cross-<br>sectional<br>Area | AWG Size  | Nominal<br>Insulation<br>Thickness | Nominal<br>Sheath<br>Thickness | Nominal<br>Inner Sheath<br>Thickness | Approx.<br>Overall<br>Diameter | Nominal<br>Copper<br>Weight | Approx.<br>Weight |
|-----------------------------------------------|-----------|------------------------------------|--------------------------------|--------------------------------------|--------------------------------|-----------------------------|-------------------|
| No. × mm <sup>2</sup>                         |           | mm                                 | mm                             | mm                                   | mm                             | kg/km                       | kg/km             |
| 18 x 0.75                                     | 18(24/32) | 0.6                                | 1.5                            | 0.8                                  | 19.9                           | 200                         | 475               |