





Caledonian

Industrial Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

H07G-K

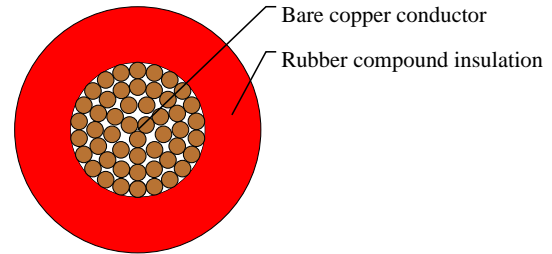

APPLICATIONS

These cables are recommended for the internal wiring of switchboards and distributor boards as well as in operating parts in or on lights. The higher temperature range allows for connections to heaters with an alternating nominal voltage of 1000V. or direct nominal voltage of 750V. These cables are all allowed for laying in tubes in and under plaster.

STANDARDS

NF C 32-102-7

ROHS compliant

VOLTAGE RATING

450/750V

CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Rubber compound type EI3 (EVA) to DIN VDE 0282 part 7 insulation
- Cores to VDE-0293 colors

COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2500volts
- Flexing bending radius: $7 \times \varnothing$
- Static bending radius: $7 \times \varnothing$
- Flexing temperature: -25°C to $+110^{\circ}\text{C}$
- Static temperature: -40°C to $+110^{\circ}\text{C}$
- Short circuit Temperature: $+160^{\circ}\text{C}$
- Flame retardant: NF C 32-070
- Insulation resistance: $10\text{ M}\Omega \times \text{km}$



Caledonian

Industrial Cables (French Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

DIMENSION AND PARAMETERS

| No. of Cores × Cross- sectional Area | AWG Size | Nominal Insulation Thickness | Approx. Overall Diameter | Nominal Copper Weight | Approx. Weight |
|--|-----------|------------------------------------|-----------------------------|--------------------------|----------------|
| No.×mm ² | | mm | mm | kg/km | kg/km |
| 1 x 2.5 | 14(50/30) | 0.9 | 4.1 | 24 | 42 |