





# Caledonian

Industrial Cables (German Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## NYY-O

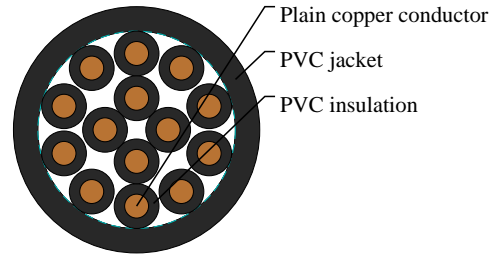

## APPLICATIONS

NYY power cable is designed for energy supply in cable ducts, power stations, industry and distribution boards and in subscriber networks. May also be used in brickwork and in concrete with the exception of cabling in shaken, vibrated or compressed concrete. NYY cables can be installed in open air, underground, in water and indoors where mechanical damages are not to be expected. The UV-resistance allows for outdoor use.

## STANDARDS

VDE-0276 Part-603 & Part-627

HD 603.1 & 627 S1

IEC 60502

VDE 0482-332-1-2

DIN EN 60332-1-2

## VOLTAGE RATING

600/1000V

## CABLE CONSTRUCTION

- Solid, plain copper conductor
- to DIN VDE 0295 cl. 1, BS 6360 cl. 1 and IEC 60228 cl. 1
- PVC insulation DIV4 to HD 603.1
- Conductor color for 3+1/2 conductor  
O-type: blue (1/2), brown, black, gray
- PVC outer jacket DMV5 to HD 603.1

## COLOUR CODE

Insulation Colour Code

14 cores - black numbered

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 4000 volts
- Flexing bending radius: 15 x Ø
- Static bending radius: 12 x Ø



# Caledonian

Industrial Cables (German Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Flexing temperature: -5° C to +50° C
- Fixed installation temperature: - 40° C to +70° C
- Flame retardant: IEC 60332.1
- Insulation resistance: >100 MΩ x km

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	AWG Size	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No.×mm <sup>2</sup>		mm	kg/km	kg/km
14 x 1.5	16	19	202	620