



Caledonian



Thermocouple Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Twisted Single Pair PFA Insulated

KX PFA insulated 1P20AWG

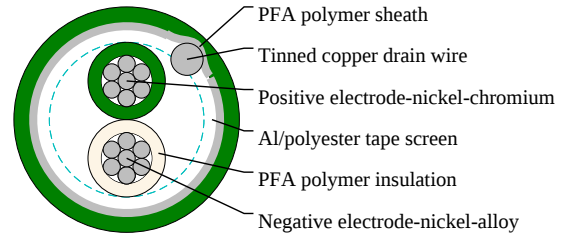

APPLICATIONS

These cables are used with thermocouples for temperature measurements.

CABLE CONSTRUCTION

Conductor: Stranded. Material is according to thermocouple type

Insulation: PFA polymer

Screen: Aluminum tape

Drain wire: Tinned copper

Outer sheath: PFA polymer

Construction: Round

KCB PFA insulated for option

COLOUR CODE

According to IEC 60584-3

Color of Insulation: Green+White

Color of Sheath: Green

PHYSICAL AND THERMAL PROPERTIES

Max. Temp.(°C): 260°C

DIMENSION AND PARAMETERS

Cable Construction	Nom. Overall Diameter	Approx. Weight
	mm	kg/km
1P20AWG (7/0.32)	3.8	30.3