




# Caledonian

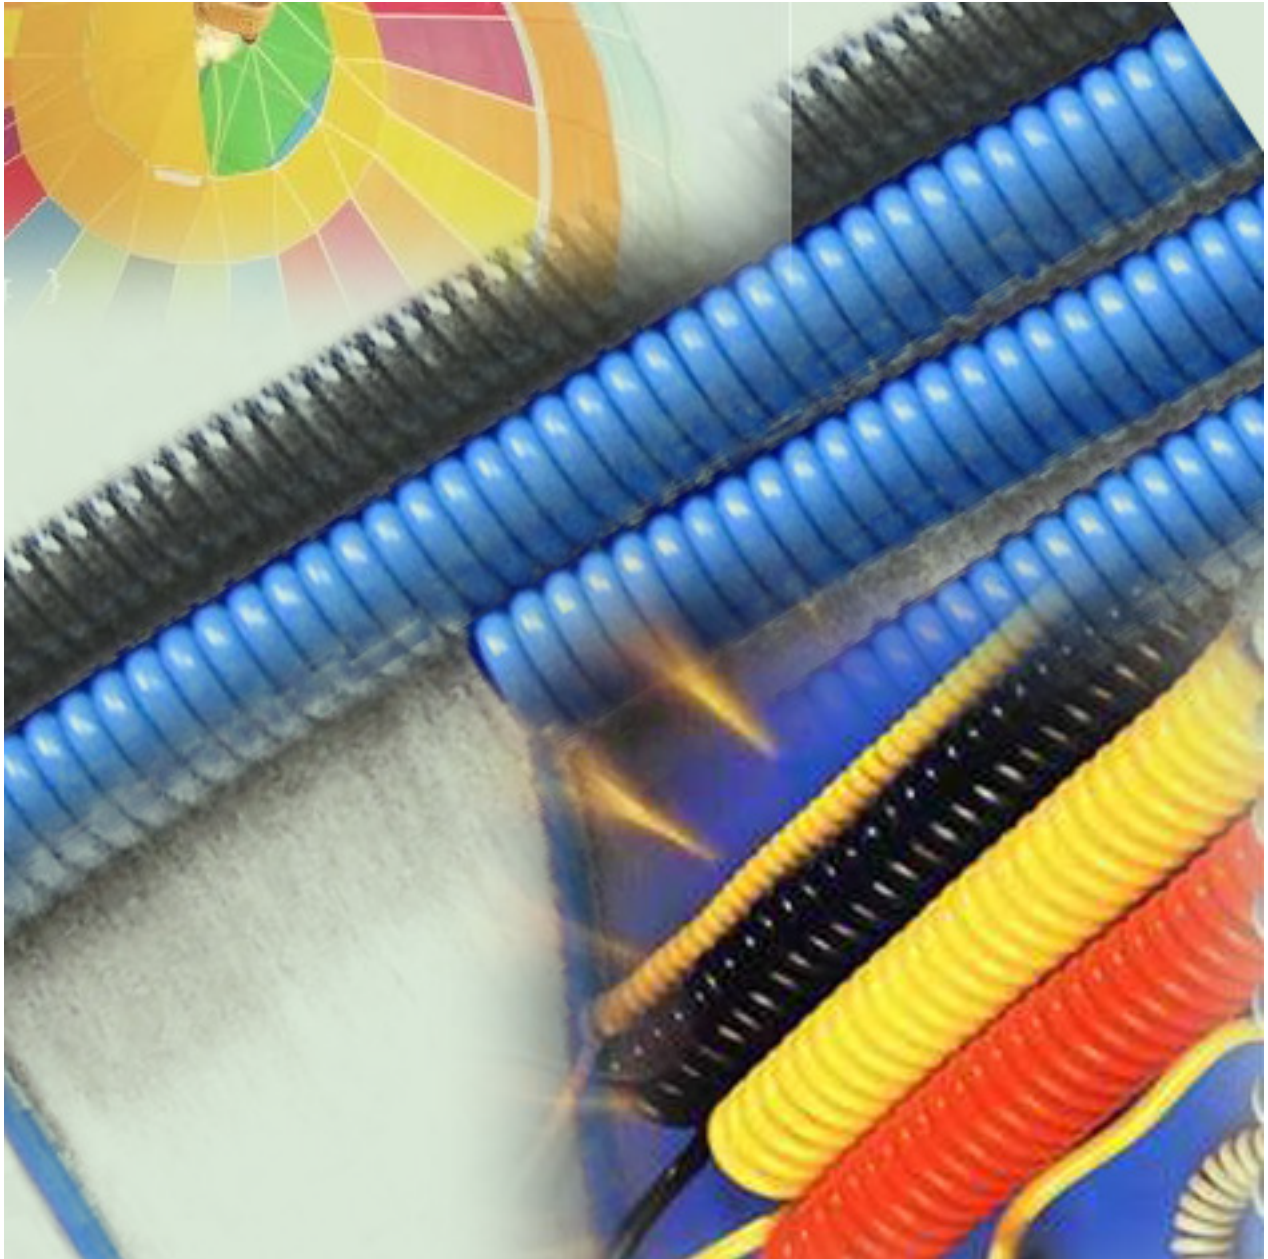

## Spiral Cables

PVC Spiral Cables

PUR Spiral Cables



## Company Profile

Caledonian, established in 1978, offers one of the most complete lines of fiber and copper cabling system solutions with over hundreds of different cabling system products. Our superior products provide leading edge within every cable series and for every application.

Among the national and international standards with which our cables could comply are: BS-British Standard; LPCB Fire Performance Standard. ISO Standard etc. Caledonian Cables offers a comprehensive stock of cables and cabling products through its nationwide network of resellers and distributors. Caledonian Cables has continually expanded its global presence in Europe and Asia.

Caledonian & Addison, produces a wide range of cables for communication, power and electronics in its primary plants in UK, Italy and Spain. To stay in front, we continually keep expanding our manufacturing capabilities in more low cost region such as Romania, Taiwan, Malaysia etc. This low-cost manufacturing facilities enable us provide a flexible, scalable global system that delivers superior operational performance and optimal results for our customers.

Our extensive global network of manufacturing facilities gives us significant scale and the flexibility to fulfill our customer requirements. This global presence provides design and consultancy solutions that are combined with core cable manufacturing, logistic services, and vertically integrated with our E-commerce technologies, to optimize customer operations by lowering costs and reducing time to market.

Caledonian & Addison has been respected for its high standards of quality, excellent service level, competitive pricing and a unique and innovative spirit. With our latest technologies, we are both inspired and well-positioned to meet the changing needs of our customers. We have the resources to diversify and to enhance our product lines and services. We understand the need for change and with our accurate planning, we are ready for the future and the promise of new marketing opportunities. Our tradition of growth through excellence is assured.

Our Design Centers work closely with customers to constantly improve its standard range of products and technologies and to develop customized, country and industry specific solutions. Caledonian & Addison has established an extensive network of design, manufacturing, and logistics facilities in the world's major markets to serve the growing outsourcing needs of both multinational and regional customers.



PVC Spiral Cable

PUR Spiral Cable

# Caledonian Spiral Cables

## Table of content

### PVC Spiral Cables

PVC/PVC Spiral Cables ..... 5

### PUR Spiral cables

PVC/PUR Spiral Cables ..... 8

EPR/PUR Spiral Cables ..... 11

Electronic unscreened spiral cables (TPE-E/PUR) ..... 14

Electronic Screened Spiral cable (TPE-E/PUR)..... 17

**Enquiry Spiral cables** ..... 20



## PVC spiral cables







PVC Spiral Cable

PUR Spiral Cable


# Caledonian Spiral Cables

## PVC/PVC spiral cable

### Application:

These PVC spiral cables are used in lighting industry, machine industry, power tools, construction industry, consumer electronics, mobile equipment etc. These cables offers excellent low mechanical and chemical resistance capabilities; middle elastic force; has good low-cost advantage. PVC cables have a high reset power, an excellent appearance and especially a long service life.

### Construction:

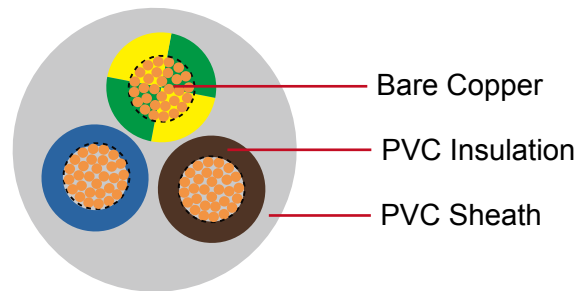

**Conductor:** bare copper conductors according to DIN VDE 0295 and IEC 60228 class 5

**Conductor sizes:** 0.5mm<sup>2</sup> to 1.5mm<sup>2</sup>, 2 to 5 cores

**Core Insulation:** PVC core insulation

**Core Color Code:** according to VDE 0293 or DIN 47100

**sheath:** PVC outer sheath

**sheath color:** black, white or grey

### Characteristics:

**Temperature Rating:** -5°C to +70°C

### Voltage Rating:

H03VVH8-F 300/300V (up to 1 mm<sup>2</sup>)

H05VVH8-F 300/500V (from 1.5 mm<sup>2</sup>)

**Test voltage:** 2000 V

# Caledonian Spiral Cables



PVC Spiral Cable

PUR Spiral Cable

## Dimensions and Weight:

AWG	Cross-section mm <sup>2</sup>	Closed Spiral Length mm	Cable Diameter mm	Outer Diameter mm	Copper Count Weight kg/km
18	2 x 0.75	200	6.20	21.40	34.60
18	2 x 0.75	400	6.20	21.40	63.40
18	2 x 0.75	600	6.20	21.40	92.20
18	2 x 0.75	800	6.20	21.40	121.00
18	2 x 0.75	1000	6.20	21.40	149.80
18	2 x 0.75	1200	6.20	21.40	178.60
18	2 x 0.75	1400	6.20	21.40	207.40
18	3 x 0.75	200	6.60	22.20	51.90
18	3 x 0.75	400	6.60	22.20	95.10
18	3 x 0.75	600	6.60	22.20	138.30
18	3 x 0.75	800	6.60	22.20	181.50
18	3 x 0.75	1000	6.60	22.20	224.70
18	3 x 0.75	1200	6.60	22.20	267.80
18	3 x 0.75	1400	6.60	22.20	311.10
17	2 x 1.00	200	6.60	22.20	43.20
17	2 x 1.00	400	6.60	22.20	65.30
17	2 x 1.00	600	6.60	22.20	122.80
17	2 x 1.00	800	6.60	22.20	161.30
17	2 x 1.00	1000	6.60	22.20	199.70
17	2 x 1.00	1200	6.60	22.20	238.10
17	2 x 1.00	1400	6.60	22.20	276.50
16	2 x 1.50	200	7.70	26.40	69.60
16	2 x 1.50	400	7.70	26.40	127.00
16	2 x 1.50	600	7.70	26.40	185.60
16	2 x 1.50	800	7.70	26.40	243.60
16	2 x 1.50	1000	7.70	26.40	301.60
16	2 x 1.50	1200	7.70	26.40	359.60
16	2 x 1.50	1400	7.70	26.40	417.60
16	3 x 1.50	200	8.50	29.00	103.20
16	3 x 1.50	400	8.50	29.00	189.20
16	3 x 1.50	600	8.50	29.00	275.20
16	3 x 1.50	800	8.50	29.00	361.20
16	3 x 1.50	1000	8.50	29.00	447.20
16	3 x 1.50	1200	8.50	29.00	533.20
16	3 x 1.50	1400	8.50	29.00	619.20



PVC Spiral Cable

PUR Spiral Cable

# Caledonian Spiral Cables

## PUR spiral cable






## PVC/PUR spiral cable

### Application:

These PVC/PUR spiral cables are used as till feeder cable and they are ideally suited for use of high quality kitchen and housekeeping utensils, lighting, electrical tools, building industry, handling equipment, entertainment equipment etc. These cables have a high reset power, an excellent appearance and especially a long service life.

### Construction:

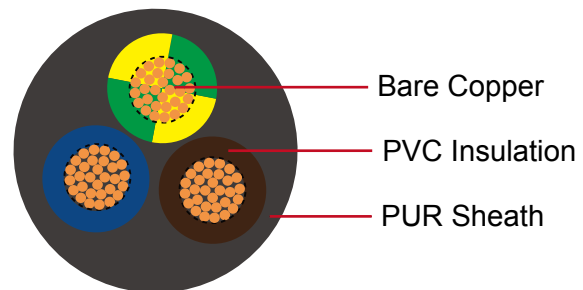

**Conductor:** stranded bare copper conductors according to VDE 0295 class 5

**Cores twisted**

**Core Insulation:** PVC core insulation

**Core Color Code:** according to VDE0293 or DIN 47100

**sheath:** PUR outer sheath

**sheath color:** black (other colors and types are available on request)

### Characteristics:

**Temperature Rating:** -5°C to +80°C

**Voltage Rating:**

300V/500V (up to 1 mm<sup>2</sup>), for type H07BQ-F 450/750 V (up to 1.5 mm<sup>2</sup>)

**Elasticity ratio:** PVC/PUR black approx 1 : 4

**Test voltage:** 2000 V, for type H07BQ-F 2500V





PVC Spiral Cable

PUR Spiral Cable

# Caledonian Spiral Cables

## Dimensions and Weight:

AWG	Cross-section	Closed Spiral Length	Cable Diameter	Outer Diameter	Copper Count Weight
	mm <sup>2</sup>	mm	mm	mm	kg/km
18	2 x 0.75	500	6.50	23.00	77.80
18	2 x 0.75	1000	6.50	23.00	149.80
18	2 x 0.75	1400	6.50	23.00	207.40
18	2 x 0.75	2000	6.50	23.00	293.80
18	2 x 0.75	3000	6.50	23.00	437.80
18	3 x 0.75	500	7.10	25.20	116.70
18	3 x 0.75	1000	7.10	25.20	224.70
18	3 x 0.75	1400	7.10	25.20	311.10
18	3 x 0.75	2000	7.10	25.20	440.60
18	3 x 0.75	3000	7.10	25.20	656.60
18	4 x 0.75	500	7.90	28.80	156.60
18	4 x 0.75	1000	7.90	28.80	301.60
18	4 x 0.75	1400	7.90	28.80	417.60
18	4 x 0.75	2000	7.90	28.80	591.60
18	4 x 0.75	3000	7.90	28.80	881.60
18	5 x 0.75	500	8.60	31.20	194.40
18	5 x 0.75	1000	8.60	31.20	374.40
18	5 x 0.75	1400	8.60	31.20	518.40
18	5 x 0.75	2000	8.60	31.20	734.40
18	5 x 0.75	3000	8.60	31.20	1094.40
17	2 x 1.00	500	6.80	24.60	103.70
17	2 x 1.00	1000	6.80	24.60	199.70
17	2 x 1.00	1400	6.80	24.60	276.50
17	2 x 1.00	2000	6.80	24.60	391.70
17	2 x 1.00	3000	6.80	24.60	583.70
17	3 x 1.00	500	7.20	26.40	156.60
17	3 x 1.00	1000	7.20	26.40	301.60
17	3 x 1.00	1400	7.20	26.40	417.60
17	3 x 1.00	2000	7.20	26.40	591.60
17	3 x 1.00	3000	7.20	26.40	884.60
17	4 x 1.00	500	7.80	28.60	207.40
17	4 x 1.00	1000	7.80	28.60	399.40
17	4 x 1.00	1400	7.80	28.60	553.00
17	4 x 1.00	2000	7.80	28.60	783.40

# Caledonian Spiral Cables



PVC Spiral Cable

PUR Spiral Cable

AWG	Cross-section	Closed Spiral Length	Cable Diameter	Outer Diameter	Copper Count Weight
	mm <sup>2</sup>	mm	mm	mm	kg/km
17	4 x 1.00	3000	7.80	28.60	1167.40
17	5 x 1.00	500	9.00	32.00	259.20
17	5 x 1.00	1000	9.00	32.00	499.20
17	5 x 1.00	1400	9.00	32.00	691.20
17	5 x 1.00	2000	9.00	32.00	979.20
17	5 x 1.00	3000	9.00	32.00	1459.20
17	7 x 1.00	500	11.10	39.00	361.80
17	7 x 1.00	1000	11.10	39.00	696.80
17	7 x 1.00	1400	11.10	39.00	964.80
17	7 x 1.00	2000	11.10	39.00	1366.80
17	7 x 1.00	3000	11.10	39.00	2036.80
16	2 x 1.50	500	8.50	30.00	156.60
16	2 x 1.50	1000	8.50	30.00	301.60
16	2 x 1.50	1400	8.50	30.00	417.60
16	2 x 1.50	2000	8.50	30.00	591.60
16	2 x 1.50	3000	8.50	30.00	881.60
16	3 x 1.50	500	8.90	32.80	232.20
16	3 x 1.50	1000	8.90	32.80	447.20
16	3 x 1.50	1400	8.90	32.80	619.20
16	3 x 1.50	2000	8.90	32.80	877.20
16	3 x 1.50	3000	8.90	32.80	1307.20
16	5 x 1.50	500	10.90	38.80	388.80
16	5 x 1.50	1000	10.90	38.80	748.80
16	5 x 1.50	1400	10.90	38.80	1036.80
16	5 x 1.50	2000	10.90	38.80	1468.80
16	5 x 1.50	3000	10.90	38.80	2188.80
16	7 x 1.50	500	12.20	46.40	545.40
16	7 x 1.50	1000	12.20	46.40	1050.40
16	7 x 1.50	1400	12.20	46.40	1451.10
16	7 x 1.50	2000	12.20	46.40	2060.40
16	7 x 2.50	3000	12.20	46.40	3070.40
16	3 x 2.50	500	10.60	38.20	388.80
16	3 x 2.50	1000	10.60	38.20	748.80
16	3 x 2.50	1400	10.60	38.20	1036.80
16	3 x 2.50	2000	10.60	38.20	1468.80
16	3 x 2.50	3000	10.60	38.20	2188.80



PVC Spiral Cable

PUR Spiral Cable


# Caledonian Spiral Cables

## EPR/PUR spiral cable

### Application:

These EPR/PUR spiral cables are used as till feeder cable and they are ideally suited for use of high quality kitchen and housekeeping utensils, lighting, electrical tools, building industry, handing equipment, entertainment equipment etc. These cables have a high reset power, an excellent appearance and especially a long service life.

### Construction:

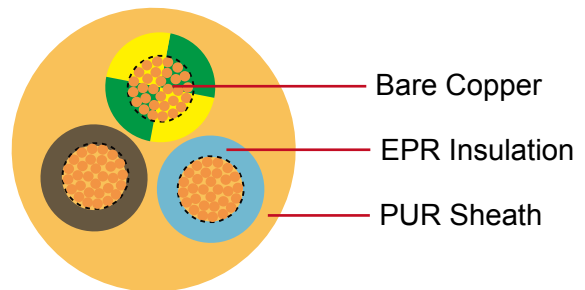

**Conductor:** stranded bare copper conductors according to VDE 0295 class 5

**Cores twisted**

**Core Insulation:** EPR core insulation

**Core Color Code:** according to VDE0293 or DIN 47100

**sheath:** PUR outer sheath

**sheath color:** orange (other colors and types are available on request)

### Characteristics:

**Temperature Rating:** -25°C to +80°C

**Voltage Rating:**

H05BQ-F 300V/500V (up to 1 mm<sup>2</sup>), for type H07BQ-F 450/750 V (up to 1.5 mm<sup>2</sup>)

**Elasticity ratio:** EPR/PUR black approx 1 : 5

**Test voltage:** H05BQ-F 2000 V, for type H07BQ-F 2500V

# Caledonian Spiral Cables



PVC Spiral Cable

PUR Spiral Cable

## Dimensions and Weight:

AWG	Cross-section	Closed Spiral Length	Cable Diameter	Outer Diameter	Copper Count Weight
	mm <sup>2</sup>	mm	mm	mm	kg/km
18	2 x 0.75	300	6.50	23.00	59.00
18	2 x 0.75	500	6.50	23.00	77.80
18	2 x 0.75	1000	6.50	23.00	149.80
18	2 x 0.75	1500	6.50	23.00	221.80
18	2 x 0.75	3000	6.50	23.00	437.80
18	3 x 0.75	300	7.10	25.20	73.50
18	3 x 0.75	500	7.10	25.20	116.70
18	3 x 0.75	1000	7.10	25.20	224.70
18	3 x 0.75	1500	7.10	25.20	332.60
18	3 x 0.75	3000	7.10	25.20	656.60
18	4 x 0.75	300	7.90	28.80	98.60
18	4 x 0.75	500	7.90	28.80	156.60
18	4 x 0.75	1000	7.90	28.80	301.60
18	4 x 0.75	1500	7.90	28.80	446.60
18	4 x 0.75	3000	7.90	28.80	881.60
18	5 x 0.75	300	8.60	31.20	122.40
18	5 x 0.75	500	8.60	31.20	194.40
18	5 x 0.75	1000	8.60	31.20	374.40
18	5 x 0.75	1500	8.60	31.20	554.40
18	5 x 0.75	3000	8.60	31.20	1094.40
17	2 x 1.00	300	6.80	24.60	65.30
17	2 x 1.00	500	6.80	24.60	103.70
17	2 x 1.00	1000	6.80	24.60	199.70
17	2 x 1.00	1500	6.80	24.60	295.70
17	2 x 1.00	3000	6.80	24.60	583.70
17	3 x 1.00	300	7.20	26.40	98.60
17	3 x 1.00	500	7.20	26.40	156.60
17	3 x 1.00	1000	7.20	26.40	301.60
17	3 x 1.00	1500	7.20	26.40	446.60
17	3 x 1.00	3000	7.20	26.40	881.60
17	4 x 1.00	300	7.80	28.60	130.60
17	4 x 1.00	500	7.80	28.60	207.40
17	4 x 1.00	1000	7.80	28.60	399.40
17	4 x 1.00	1500	7.80	28.60	591.40
17	4 x 1.00	3000	7.80	28.60	1167.40
17	5 x 1.00	300	9.00	32.00	163.20
17	5 x 1.00	500	9.00	32.00	259.20
17	5 x 1.00	1000	9.00	32.00	499.20
17	5 x 1.00	1500	9.00	32.00	739.20
17	5 x 1.00	3000	9.00	32.00	1459.20
16	2 x 1.50	300	8.50	30.00	98.60





PVC Spiral Cable

PUR Spiral Cable

# Caledonian Spiral Cables

AWG	Cross-section	Closed Spiral Length	Cable Diameter	Outer Diameter	Copper Count Weight
	mm <sup>2</sup>	mm	mm	mm	kg/km
16	2 x 1.50	500	8.50	30.00	156.60
16	2 x 1.50	1000	8.50	30.00	301.60
16	2 x 1.50	1500	8.50	30.00	446.60
16	2 x 1.50	3000	8.50	30.00	881.60
16	3 x 1.50	300	8.90	32.80	146.20
16	3 x 1.50	500	8.90	32.80	232.20
16	3 x 1.50	1000	8.90	32.80	447.20
16	3 x 1.50	1500	8.90	32.80	662.20
16	3 x 1.50	3000	8.90	32.80	1307.20
16	5 x 1.50	300	10.90	38.80	244.80
16	5 x 1.50	500	10.90	38.80	388.80
16	5 x 1.50	1000	10.90	38.80	748.80
16	5 x 1.50	1500	10.90	38.80	1108.80
16	5 x 1.50	3000	10.90	38.80	2188.80
16	7 x 1.50	300	12.60	46.40	343.40
16	7 x 1.50	500	12.60	46.40	545.40
16	7 x 1.50	1000	12.60	46.40	1050.40
16	7 x 1.50	1500	12.60	46.40	1555.40
16	7 x 1.50	3000	12.60	46.40	3070.40
16	12 x 1.50	300	16.60	65.20	588.20
16	12 x 1.50	500	16.60	65.20	934.20
16	12 x 1.50	1000	16.60	65.20	1799.20
16	12 x 1.50	1500	16.60	65.20	2664.20
16	12 x 2.50	3000	16.60	65.20	5259.20
14	3 x 2.50	300	10.60	38.20	244.80
14	3 x 2.50	500	10.60	38.20	388.80
14	3 x 2.50	1000	10.60	38.20	748.80
14	3 x 2.50	1500	10.60	38.20	1108.80
14	3 x 2.50	3000	10.60	38.20	2188.80
14	5 x 2.50	300	13.20	48.40	408.00
14	5 x 2.50	500	13.20	48.40	648.00
14	5 x 2.50	1000	13.20	48.40	1248.00
14	5 x 2.50	1500	13.20	48.40	1848.00
14	5 x 2.50	3000	13.20	48.40	3648.00




## Electronic unscreened spiral cables (TPE-E/PUR)

### Application:

These TPE-E/PUR unscreened spiral cables are used in lighting industry, machine industry, power tools, construction industry, consumer electronics, mobile equipment etc. These cables are screened against high frequency interference. Suitable for use in the control cable sectors requiring the use of screened semi-conductors.

### Construction:

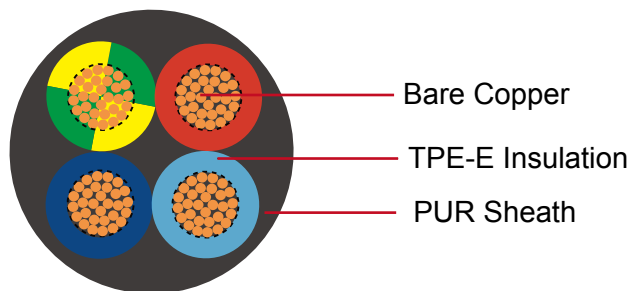

**Conductor:** stranded bare copper conductors according to DIN VDE 0295

**Cores twisted**

**Core Insulation:** TPE-E core insulation

**Core Color Code:** according to VDE0293 or DIN 47100

**sheath:** PUR outer sheath

**sheath color:** black (other colors and types are available on request)

### Characteristics:

**Temperature Rating:** -25°C to +85°C

**Voltage Rating:**

300V (up to 0.14 mm<sup>2</sup>)

500V (up to 0.25 mm<sup>2</sup>)

**Elasticity ratio:** TPE/PUR black approx 1 : 4

**Test voltage:** 2000 V



PVC Spiral Cable

PUR Spiral Cable

# Caledonian Spiral Cables

## Dimensions and Weight:

AWG	Cross-section	Closed Spiral Length	Cable Diameter	Outer Diameter	Copper Count Weight
	mm <sup>2</sup>	mm	mm	mm	kg/km
26	2 x 0.14	300	3.50	13.00	9.20
26	2 x 0.14	400	3.50	13.00	11.90
26	2 x 0.14	500	3.50	13.00	15.60
26	2 x 0.14	1000	3.50	13.00	28.10
26	4 x 0.14	300	4.00	14.00	18.40
26	4 x 0.14	400	4.00	14.00	23.80
26	4 x 0.14	500	4.00	14.00	29.20
26	4 x 0.14	1000	4.00	14.00	56.20
26	5 x 0.14	300	4.40	15.80	22.80
26	5 x 0.14	400	4.40	15.80	29.50
26	5 x 0.14	500	4.40	15.80	36.20
26	5 x 0.14	1000	4.40	15.80	69.70
26	6 x 0.14	300	4.90	17.80	27.50
26	6 x 0.14	400	4.90	17.80	36.70
26	6 x 0.14	500	4.90	17.80	43.80
26	6 x 0.14	1000	4.90	17.80	84.20
26	7 x 0.14	300	5.20	18.40	32.00
26	7 x 0.14	400	5.20	18.40	42.40
26	7 x 0.14	500	5.20	18.40	50.80
26	7 x 0.14	1000	5.20	18.40	97.80
26	8 x 0.14	300	5.40	19.80	36.70
26	8 x 0.14	400	5.40	19.80	47.50
26	8 x 0.14	500	5.40	19.80	58.30
26	8 x 0.14	1000	5.40	19.80	112.30
24	2 x 0.25	300	3.90	13.80	16.30
24	2 x 0.25	400	3.90	13.80	21.10
24	2 x 0.25	500	3.90	13.80	25.90
24	2 x 0.25	1000	3.90	13.80	49.90
24	4 x 0.25	300	4.60	17.20	36.70
24	4 x 0.25	400	4.60	17.20	42.20
24	4 x 0.25	500	4.60	17.20	51.80
24	4 x 0.25	1000	4.60	17.20	99.80
24	5 x 0.25	300	5.40	19.80	40.80
24	5 x 0.25	400	5.40	19.80	52.80
24	5 x 0.25	500	5.40	19.80	64.80
24	5 x 0.25	1000	5.40	19.80	124.80
24	6 x 0.25	300	5.50	20.00	48.90
24	6 x 0.25	400	5.50	20.00	63.40
24	6 x 0.25	500	5.50	20.00	77.8
24	6 x 0.25	1000	5.50	20.00	149.80
24	8 x 0.25	300	6.40	23.80	65.30

# Caledonian Spiral Cables



PVC Spiral Cable

PUR Spiral Cable

AWG	Cross-section	Closed Spiral Length	Cable Diameter	Outer Diameter	Copper Count Weight
	mm <sup>2</sup>	mm	mm	mm	kg/km
24	8 x 0.25	400	6.40	23.80	84.50
24	8 x 0.25	500	6.40	23.80	103.70
24	8 x 0.25	1000	6.40	23.80	199.70
24	12 x 0.25	300	6.90	24.80	97.90
24	12 x 0.25	400	6.90	24.80	126.70
24	12 x 0.25	500	6.90	24.80	155.50
24	12 x 0.25	1000	6.90	24.80	299.50
20	2 x 0.50	300	4.60	16.20	32.60
20	2 x 0.50	400	4.60	16.20	42.30
20	2 x 0.50	500	4.60	16.20	51.80
20	2 x 0.50	1000	4.60	16.20	99.80
20	4 x 0.50	300	5.00	18.00	65.30
20	4 x 0.50	400	5.00	18.00	84.50
20	4 x 0.50	500	5.00	18.00	103.70
20	4 x 0.50	1000	5.00	18.00	201.80
20	6 x 0.50	300	6.20	22.40	97.90
20	6 x 0.50	400	6.20	22.40	126.70
20	6 x 0.50	500	6.20	22.40	155.50
20	6 x 0.50	1000	6.20	22.40	299.50
20	8 x 0.50	300	7.40	26.80	130.60
20	8 x 0.50	400	7.40	26.80	169.00
20	8 x 0.50	500	7.40	26.80	207.40
20	8 x 0.50	1000	7.40	26.80	399.40
20	12 x 0.50	300	8.20	29.40	195.80
20	12 x 0.50	400	8.20	29.40	254.30
20	12 x 0.50	500	8.20	29.40	311.10
20	12 x 0.50	1000	8.20	29.40	599.10





PVC Spiral Cable

PUR Spiral Cable


# Caledonian Spiral Cables

## Electronic Screened Spiral cable (TPE-E/PUR)

### Application:

These TPE-E/PUR screened spiral cables are used in lighting industry, machine industry, power tools, construction industry, consumer electronics, mobile equipment etc. these cables are screened against high frequency interference. Suitable for use in the control cable sectors requiring the use of screened semi-conductors.

### Construction:

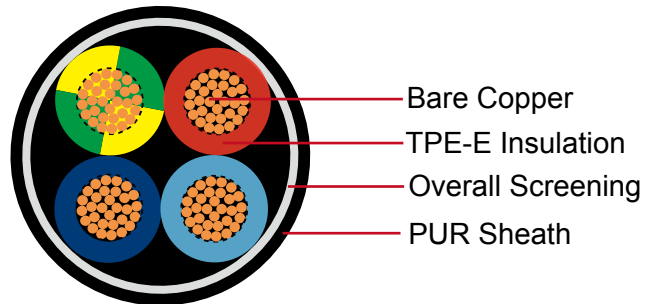

**Conductor:** stranded bare copper conductors according to DIN VDE 0295 and IEC 60228 cl. 5

**Cores twisted**

**Overall screening**

**Core Insulation:** TPE-E core insulation

**Core Color Code:** according to VDE 0293 or DIN 47100

**sheath:** PUR outer sheath

**sheath color:** black (other colors and types are available on request)

### Characteristics:

**Temperature Rating:** -25°C to +70°C

**Voltage Rating:**

300V (up to 0.14 mm<sup>2</sup>)

500V (up to 0.25 mm<sup>2</sup>)

**Elasticity ratio:** TPE/PUR black approx 1 : 4

**Test voltage:** 2000 V

# Caledonian Spiral Cables



PVC Spiral Cable

PUR Spiral Cable

## Dimensions and Weight:

AWG	Cross-section	Closed Spiral Length	Cable Diameter	Outer Diameter	Copper Count Weight
	mm <sup>2</sup>	mm	mm	mm	kg/km
26	2 x 0.14	300	3.80	13.60	30.60
26	2 x 0.14	400	3.80	13.60	39.60
26	2 x 0.14	500	3.80	13.60	48.60
26	2 x 0.14	1000	3.80	13.60	93.60
26	3 x 0.14	300	4.10	15.20	44.20
26	3 x 0.14	400	4.10	15.20	55.80
26	3 x 0.14	500	4.10	15.20	67.50
26	3 x 0.14	1000	4.10	15.20	135.00
26	4 x 0.14	300	4.60	16.20	47.60
26	4 x 0.14	400	4.60	16.20	61.60
26	4 x 0.14	500	4.60	16.20	75.60
26	4 x 0.14	1000	4.60	16.20	145.60
26	5 x 0.14	300	4.60	17.20	54.40
26	5 x 0.14	400	4.60	17.20	70.40
26	5 x 0.14	500	4.60	17.20	86.40
26	5 x 0.14	1000	4.60	17.20	166.40
26	6 x 0.14	300	5.20	19.40	64.60
26	6 x 0.14	400	5.20	19.40	83.60
26	6 x 0.14	500	5.20	19.40	102.60
26	6 x 0.14	1000	5.20	19.40	197.60
26	7 x 0.14	300	5.50	20.00	68.00
26	7 x 0.14	400	5.50	20.00	88.00
26	7 x 0.14	500	5.50	20.00	108.00
26	7 x 0.14	1000	5.50	20.00	208.00
26	8 x 0.14	300	5.60	20.20	74.80
26	8 x 0.14	400	5.60	20.20	96.80
26	8 x 0.14	500	5.60	20.20	118.80
26	8 x 0.14	1000	5.60	20.20	228.80
26	2 x 0.25	300	4.50	16.00	51.00
26	2 x 0.25	400	4.50	16.00	66.00
26	2 x 0.25	500	4.50	16.00	81.00
26	2 x 0.25	1000	4.50	16.00	156.00
26	4 x 0.25	300	5.00	18.00	74.80
26	4 x 0.25	400	5.00	18.00	96.80
26	4 x 0.25	500	5.00	18.00	118.80
26	4 x 0.25	1000	5.00	18.00	228.80
24	5 x 0.25	300	5.40	19.80	85.00
24	5 x 0.25	400	5.40	19.80	110.00
24	5 x 0.25	500	5.40	19.80	135.00
24	5 x 0.25	1000	5.40	19.80	260.00



PVC Spiral Cable


PUR Spiral Cable

# Caledonian Spiral Cables

AWG	Cross-section	Closed Spiral Length	Cable Diameter	Outer Diameter	Copper Count Weight
	mm <sup>2</sup>	mm	mm	mm	kg/km
24	6 x 0.25	300	5.70	20.40	102.00
24	6 x 0.25	400	5.70	20.40	132.00
24	6 x 0.25	500	5.70	20.40	162.00
24	6 x 0.25	1000	5.70	20.40	312.00
24	8 x 0.25	300	6.50	23.00	119.00
24	8 x 0.25	400	6.50	23.00	154.00
24	8 x 0.25	500	6.50	23.00	189.00
24	8 x 0.25	1000	6.50	23.00	364.00
24	12 x 0.25	300	7.10	26.20	170.00
24	12 x 0.25	400	7.10	26.20	220.00
24	12 x 0.25	500	7.10	26.20	270.00
24	12 x 0.25	1000	7.10	26.20	520.00
20	2 x 0.50	300	5.50	20.00	78.20
20	2 x 0.50	400	5.50	20.00	101.20
20	2 x 0.50	500	5.50	20.00	124.20
20	2 x 0.50	1000	5.50	20.00	239.20
20	4 x 0.50	300	5.80	21.60	153.00
20	4 x 0.50	400	5.80	21.60	198.00
20	4 x 0.50	500	5.80	21.60	243.00
20	4 x 0.50	1000	5.80	21.60	648.00
20	6 x 0.50	300	7.00	26.00	231.20
20	6 x 0.50	400	7.00	26.00	299.20
20	6 x 0.50	500	7.00	26.00	367.20
20	6 x 0.50	1000	7.00	26.00	707.20
20	8 x 0.50	300	8.00	29.00	289.00
20	8 x 0.50	400	8.00	29.00	374.00
20	8 x 0.50	500	8.00	29.00	459.00
20	8 x 0.50	1000	8.00	29.00	884.00
20	12 x 0.50	300	8.80	31.60	380.80
20	12 x 0.50	400	8.80	31.60	492.80
20	12 x 0.50	500	8.80	31.60	604.80
20	12 x 0.50	1000	8.80	31.60	1164.80



## Enquiry Spiral Cables

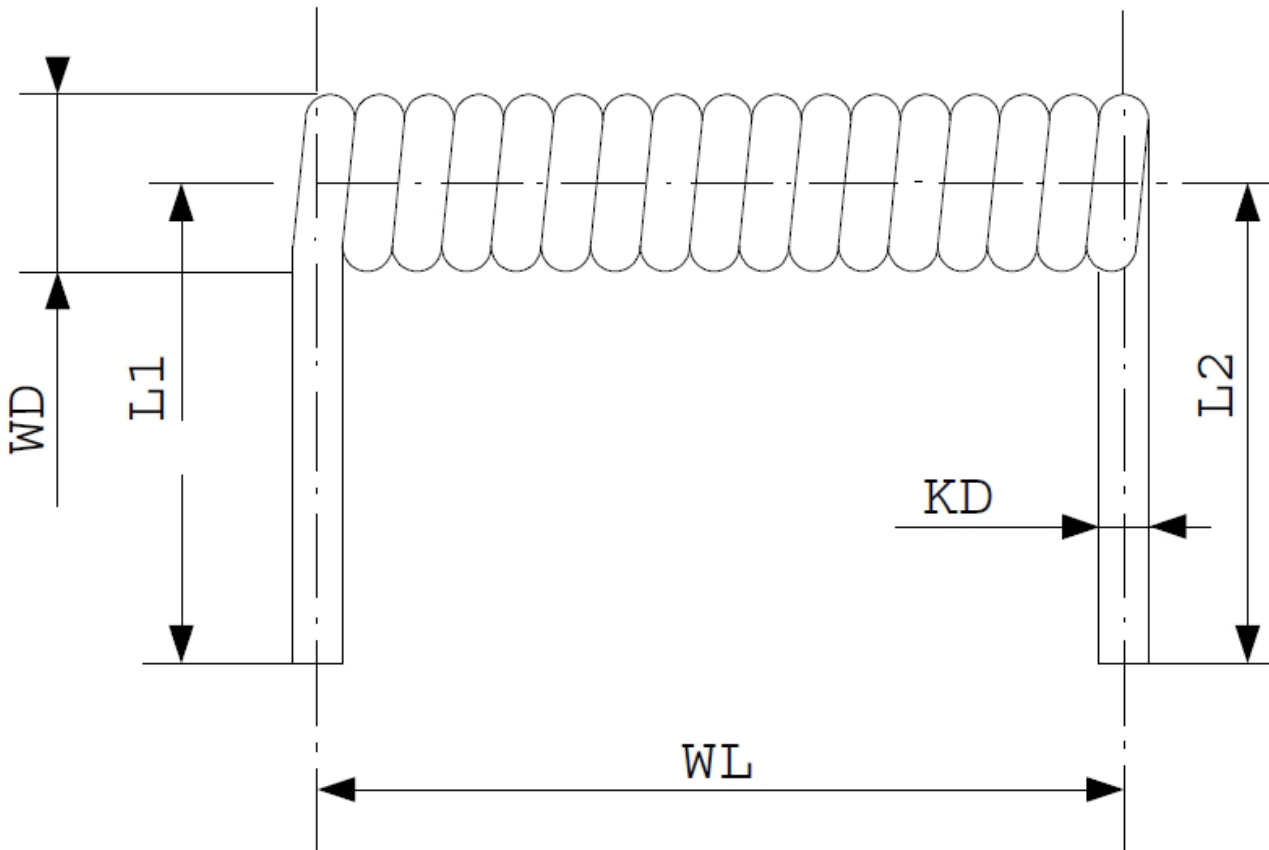

WL: Spiral length    WD: Spiral outer diameter    KD: Internal diameter    L1 and L2: End lengths

**For a quotation of spiral cable we ask you to fill out this specification form:**

Number of cores : \_\_\_\_\_

Core mm<sup>2</sup> : \_\_\_\_\_

Spiral length unextended (WL): . \_\_\_\_\_

End parts length (L1 and L2, the standard is 25 cm): \_\_\_\_\_

Quantity: \_\_\_\_\_

Company name : \_\_\_\_\_

Address : \_\_\_\_\_

City : \_\_\_\_\_

Your name : \_\_\_\_\_

Tel.nr. : \_\_\_\_\_

Fax.nr. : \_\_\_\_\_

E-mail address : \_\_\_\_\_





# *Caledonian Cables*

Merchant Ind. Centre  
Mill-Lane, Laughton, Lewes, Sussex, BN8 6AJ  
England  
United Kingdom  
Tel: 44- 207- 4195087  
Fax: 44- 207- 8319489  
Email: [sales@caledonian-cables.net](mailto:sales@caledonian-cables.net)  
[sales@caledonian-cables.co.uk](mailto:sales@caledonian-cables.co.uk)  
[uk@addison-cables.com](mailto:uk@addison-cables.com)

