




Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8332

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester

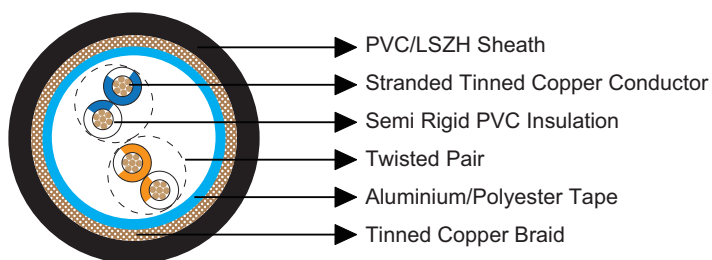

tape.

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	$^{\circ}\text{C}$	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118332V	2	0.25	0.81	6.4
BE118332H	2	0.25	0.81	6.4