



## PAS 5308 Cable Part 2 Type 2 PVC-OS-SWA-PVC

### Application

These cables are designed to connect electrical instrumentation and communication systems in and around process plants and similar applications. Generally used to transmit analogue or digital signals in measurement and process control where chemicals may be present. The armoured version are well adapted to underground use in industrial applications where chemical and mechanical protections are needed (refinery areas, chemical plant...).

### Construction

<b>Conductor</b>	Annealed copper, sizes: 0.5mm <sup>2</sup> and 0.75mm <sup>2</sup> multistranded(Class 5), 1.5mm <sup>2</sup> and 2.5mm <sup>2</sup> multistranded(Class 2) to BS EN 60228
<b>Insulation</b>	PVC to BS EN 50290-2-21:2002, grade TI51
<b>Pairing</b>	Two insulated conductors uniformly twisted together with a lay not exceeding 100mm, Two-pair cables without individual pair screens (quads) shall have four cores laid in quad formation round a central dummy
<b>Colour code</b>	Multicore cables: up to 40 cores yellow with black numbers, 41 - 80 cores black with yellow numbers. Multipair cables:See technical information
<b>Binder tape</b>	Non-hygroscopic binder tape of minimum thickness 0.023 mm
<b>Collective screen</b>	Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm <sup>2</sup>
<b>Inner Sheath</b>	Extruded sheath of a PVC compound conforming to BS EN 50290-2-22:2002, grade TM51
<b>Amour</b>	Galvanized steel wire armour
<b>Outer sheath</b>	Extruded sheath of a PVC compound conforming to BS EN 50290-2-22:2002, grade TM51
<b>Sheath colour</b>	Generally black

### Electrical Properties

**Temperature range:** above 0°C( fixed installation)


-15°C to +65°C(during operation )



<b>Conductor Area Size</b>		mm <sup>2</sup>	0.5	0.5	1	1.5	2.5
<b>Conductor Stranding</b>		No. x mm	1 x 0.8	16 x 0.2	1 x 1.13	7 x 0.53	7 x 0.67
<b>Conductor resistance max</b>		ohm/km	36.8	39.7	18.4	12.3	7.6
<b>Insulation resistance min</b>	<b>Individual conductor</b>	Gohm/km	5	5	5	5	5
	<b>individual screen</b>	Mohm/km	1	1	1	1	1
<b>Capacitance unbalance at 1 kHz(pair to pair screen)</b>		pF/250m	250				
<b>Max. Mutual Capacitance @ 1 kHz for Non OS or OS cables (except one-pair and two-pairs)</b>		pF/m	75	75	75	85	105
<b>Max. Mutual Capacitance @ 1 kHz IS/OS cables (include 1 pair and 2 pair)</b>		pF/m	115	115	115	120	140
<b>Max. L/R Ratio for adjacent cores(Inductance/Resistance)</b>		μH/ohm	25	25	25	40	60
<b>Test voltage</b>		V	2000	2000	2000	2000	2000
<b>Rated voltage</b>		V	300/500	300/500	300/500	300/500	300/500

## Parameter

### Multicore

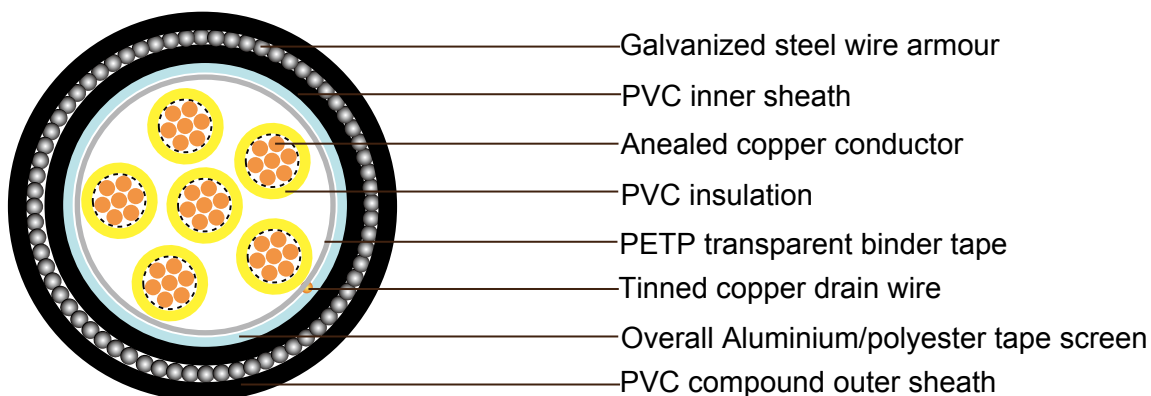



# Addison Instrumentation Cables


www.addison-cables.com

Number of Cores	Nominal Thickness of Insulation	Nominal Thickness of bedding	Nominal Diameter over Bedding	Nominal Thickness of Armour	Nominal Diameter over Armour	Nominal Thickness of Sheath	Nominal Diameter of Cable
	mm	mm	mm	mm		mm	mm
<b>stranded conductor 0.5 mm<sup>2</sup> (16/0.20mm)</b>							
2	0.6	0.8	6	0.9	7.8	1.3	10.4
3	0.6	0.8	6.3	0.9	8.1	1.3	10.7
4	0.6	0.8	6.9	0.9	8.7	1.3	11.3
6	0.6	0.8	8.1	0.9	9.9	1.4	12.7
10	0.6	0.9	10.4	1.25	12.9	1.5	15.9
20	0.6	1	13.5	1.25	16	1.5	19
40	0.6	1.2	18.2	1.6	21.4	1.7	24.8
80	0.6	1.4	25.1	2	29.1	1.9	32.9
<b>stranded conductor 0.75 mm<sup>2</sup> (24/0.20mm)</b>							
2	0.6	1.3	10.8	0.8	6.4	0.9	8.2
3	0.6	1.3	11.2	0.8	6.8	0.9	8.6
4	0.6	1.4	12	0.8	7.4	0.9	9.2
6	0.6	1.4	13.5	0.9	8.9	0.9	10.7
10	0.6	1.5	17	1	11.5	1.25	14
20	0.6	1.6	20.5	1.1	14.8	1.25	17.3
40	0.6	1.7	26.5	1.3	19.9	1.6	23.1
80	0.6	2	35.5	1.5	27.5	2	31.5
<b>stranded conductor 1.5 mm<sup>2</sup> (7/0.53mm)</b>							
2	0.6	0.8	7.3	0.9	9.1	1.4	11.9
3	0.6	0.8	7.7	0.9	9.5	1.4	12.3
4	0.6	0.9	8.7	0.9	10.5	1.4	13.3
6	0.6	0.9	10.3	1.25	12.8	1.5	15.8
10	0.6	1	13.3	1.25	15.8	1.5	18.8
20	0.6	1.2	17.4	1.6	20.6	1.7	24
40	0.6	1.4	23.4	1.6	26.6	1.8	30.2
80	0.6	1.7	32.6	2	36.6	2.1	40.8
<b>stranded conductor 2.5 mm<sup>2</sup> (7/0.67mm)</b>							
2	0.6	0.8	8.1	0.9	9.9	1.4	12.7
3	0.6	0.9	8.8	0.9	10.6	1.4	13.4
4	0.6	0.9	9.7	0.9	11.5	1.4	14.3



Number of Cores	Nominal Thickness of Insulation	Nominal Thickness of bedding	Nominal Diameter over Bedding	Nominal Thickness of Armour	Nominal Diameter over Armour	Nominal Thickness of Sheath	Nominal Diameter of Cable
	mm	mm	mm	mm		mm	mm
6	0.6	1	11.7	1.25	14.2	1.5	17.2
10	0.6	1.1	15.1	1.6	18.3	1.6	21.5
20	0.6	1.3	19.9	1.6	23.1	1.7	26.5
40	0.6	1.5	26.7	2	30.7	2	34.7
80	0.6	1.9	37.3	2.5	42.3	2.3	46.9

## Multipair

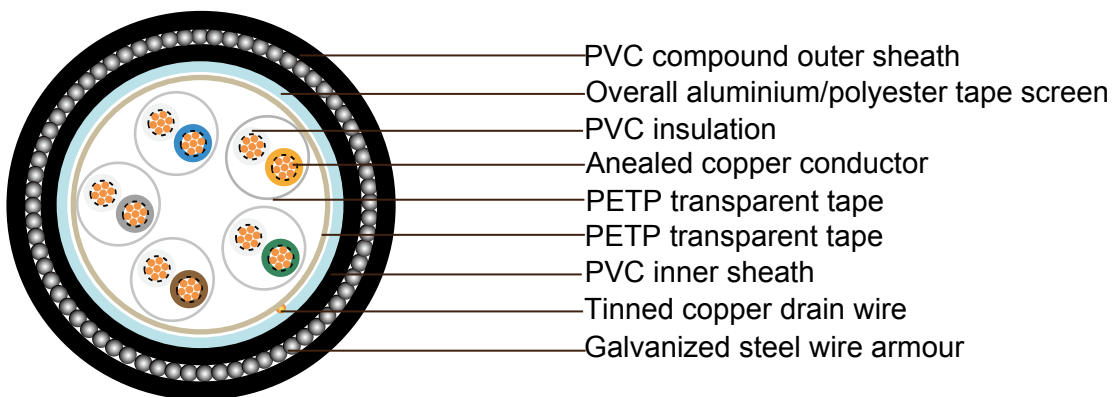

Number of Pairs	Nominal Thickness of Insulation	Nominal Thickness of bedding	Nominal Diameter over Bedding	Nominal Thickness of Armour	Nominal Diameter over Armour	Nominal Thickness of Sheath	Nominal Diameter of Cable
	mm	mm	mm	mm		mm	mm
<b>stranded conductor 0.5 mm<sup>2</sup> (16/0.20mm)</b>							
1	0.6	0.8	6	0.9	7.8	1.3	10.4
2	0.6	0.8	6.9	0.9	8.7	1.3	11.3
5	0.6	1	11.9	0.9	13.7	1.5	16.7
10	0.6	1.1	16.4	1.25	18.9	1.6	22.1
15	0.6	1.2	19	1.6	22.2	1.7	25.6
20	0.6	1.3	21.5	1.6	24.7	1.8	28.3
30	0.6	1.5	25.7	1.6	28.9	1.9	32.7
50	0.6	1.7	32.9	2	36.9	2.1	41.1



# Addison Instrumentation Cables

www.addison-cables.com

Number of Pairs	Nominal Thickness of Insulation	Nominal Thickness of bedding	Nominal Diameter over Bedding	Nominal Thickness of Armour	Nominal Diameter over Armour	Nominal Thickness of Sheath	Nominal Diameter of Cable
	mm	mm	mm	mm		mm	mm
<b>stranded conductor 0.75 mm<sup>2</sup> (24/0.20mm)</b>							
1	0.6	0.8	6.4	0.9	8.2	1.3	10.8
2	0.6	0.8	7.4	0.9	9.2	1.4	12
5	0.6	1	12.8	1.25	15.3	1.5	18.3
10	0.6	1.2	17.9	1.6	21.1	1.7	24.5
15	0.6	1.3	20.9	1.6	24.1	1.8	27.7
20	0.6	1.4	23.6	1.6	26.8	1.9	30.6
30	0.6	1.5	27.9	1.6	31.1	2	35.1
50	0.6	1.8	35.9	2	39.9	2.2	44.3
<b>stranded conductor 1.5 mm<sup>2</sup> (7/0.53mm)</b>							
1	0.6	0.8	7.3	0.9	9.1	1.4	11.9
2	0.6	0.9	8.7	0.9	10.5	1.4	13.3
5	0.6	1.1	15.1	1.25	17.6	1.6	20.8
10	0.6	1.3	21.1	1.6	24.3	1.8	27.9
15	0.6	1.4	24.6	1.6	27.8	1.9	31.6
20	0.6	1.5	27.7	1.6	30.9	2	34.9
30	0.6	1.7	33	2	37	2.1	41.2
50	0.6	2.1	42.7	2.5	47.7	2.4	52.5
<b>stranded conductor 2.5 mm<sup>2</sup> (7/0.67mm)</b>							
1	0.6	0.8	8.1	0.9	9.9	1.4	12.7
2	0.6	0.9	9.7	0.9	11.5	1.4	14.3
5	0.6	1.2	17.2	1.25	19.7	1.7	23.1
10	0.6	1.4	24.1	1.6	27.3	1.9	31.1
15	0.6	1.6	28.2	1.6	31.4	2	35.4
20	0.6	1.7	31.8	2	35.8	2.1	40
30	0.6	1.9	37.9	2	41.9	2.3	46.5
50	0.6	2.3	48.9	2.5	53.9	2.6	59.1