



Caledonian



Airport Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

PAS (Public Address System) Loudspeaker Cable

FFX200 05mRZ1-F 2G1.0 (CU/MGT+XLPE/LSZH 2×1.0mmsq 300/500V class 5)

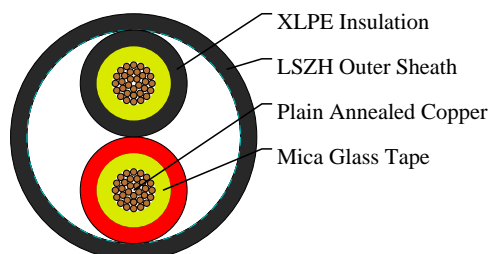

APPLICATIONS

The cables are multicore stranded flexible cables sheathed with thermoplastic LSZH compound. The cables have the ability to restrict the propagation of the flame in the event of a fire. This is especially important to slow down the spreading of the fire as the cables may pass from one area to another within a building. Applications can be found in control and power circuits, power stations, underground tunnels, lifts, escalators, and high-rise buildings.

FIRE PERFORMANCE

| | |
|---------------------------|-------------------------------------|
| Basic design | BS 7629-1 |
| Halogen Free | IEC 60754-1 |
| No corrosive gas emission | IEC 60754-2 |
| Minimum Smoke Emission | IEC 61034/1/2 |
| Reduced Fire Propagation | IEC 60332-3C / NF C 32-070-2.2 (C1) |
| Flame Retardance | IEC 60332-1 / NF C 32-070-2.1 (C2) |
| Fire Resistance | IEC 60331 / NF C 32070-2.3(CR1) |

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

Conductor: Plain annealed copper wire, stranded according to IEC(EN) 60228 class 5.

Insulation: Mica glass tape covered by extruded cross-linked XLPE compound.

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1.

PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +90°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 8 × Overall Diameter

Electrical Properties

Dielectric test: 2000 V r.m.s. x 5' (core/core)



Caledonian

Airport Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Insulation resistance: 1000 MΩ x km (at 20°C)

Short circuit temperature: 250°C

DIMENSION AND PARAMETERS

| No. of Cores | Nominal Cross-sectional Area | No./Nominal Diameter of Strands | Nominal Insulation Thickness | Nominal Sheath Thickness | Nom. Overall Diameter | Approx. Weight |
|--------------|------------------------------|---------------------------------|------------------------------|--------------------------|-----------------------|----------------|
| | mm ² | no./mm | mm | mm | mm | kg/km |
| 2 | 1 | 32/0.2 | 0.5 | 0.5 | 5.3 | 47 |




BS 7629-1



Fire Resistant
IEC 60331-21



Flame Retardant
NF C32-070-2.1(C2)
IEC 60332-1-2/EN 50265-2-1



Halogen Free
IEC 60754-1



Low Corrosivity
IEC 60754-2/EN 50267-2-2/3
NF C32-074/NF C20-453



Low Smoke Emission
IEC 61034-2 / EN 50268-2
NF C32-073/NF C 20-902



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC 60332-3-24/EN 50266-2-4