



# Caledonian


IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## TIOI (c)/ TIOU(c) (MRE-2X(St)HCH) 150/250V XLPE Insulated, LSOH (SHF1) Sheathed, Overall Screened & Armoured Flame Retardant Instrumentation & Control Cables 37T0.75

### MRE-2X(St)HCH-37T0.75

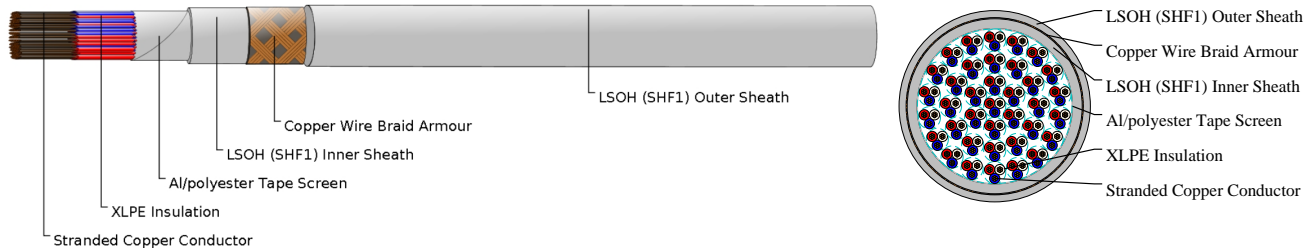

### APPLICATIONS

These armoured cables are used on board of ships in all locations for fixed installations complying with IEC standards 60092-352. These cables are flame retardant, low smoke & halogen free, suitable for installations on passenger ships, as on other commercial vessels.

### STANDARDS

IEC 60092-350/360/376/IEC 60332-1

IEC 60332-3-22/IEC 60754-1/2/IEC 61034

### CABLE CONSTRUCTION

Conductors: Class 2 stranded copper conductor.

Insulation: XLPE.

Cabling Element: Triple.

Overall Screen: Al/polyester tape.

Inner Sheath: LSOH (SHF1).

Armour: Copper wire braid.

Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

### COLOUR CODE

Triple: White/blue/red with printed triple number.

### PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations: 6×OD

Temperature Range: -30°C ~ +80°C

### DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Nom. Overall Diameter	Approx. Weight
No.×mm <sup>2</sup>	mm	mm	mm	mm	kg/km



# Caledonian

IEC60092 Offshore & Marine Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

37x3x0.75	0.5	2	1.5	38.7	2040
-----------	-----	---	-----	------	------