



Caledonian


IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

BFOI (c)/BFOU (c) (MRE-M2X(St)CH) 150/250V Mica Tape + XLPE Insulated, LSOH (SHF1) Sheathed, Overall Screened & Armoured Fire Resistant Instrumentation & Control Cables 3P0.75

MRE-M2X(St)CH-3P0.75

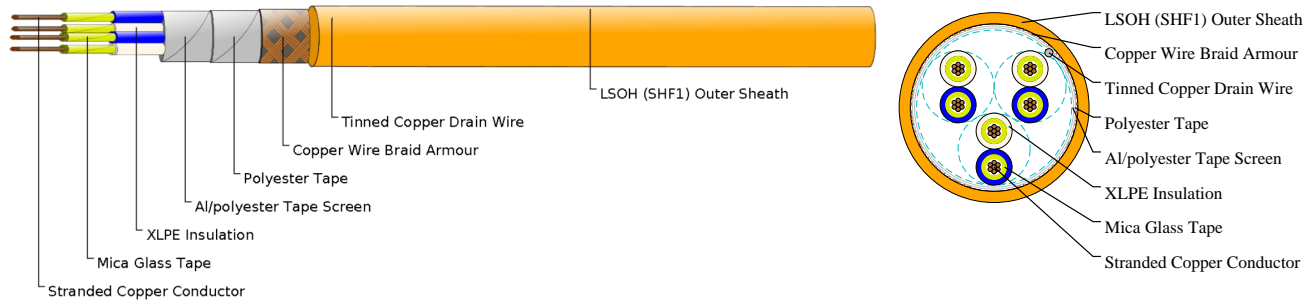

APPLICATIONS

These cables are used on board of ships in all locations for fixed installations complying with IEC standards 60092-352 in safety circuit, where fire resistance is required. These cables are fire resistant, flame retardant, low smoke & halogen free, suitable for installations on passenger ships, as on other commercial vessels.

STANDARDS

IEC 60092-350/360/376/IEC 60331-21/IEC 60332-1

IEC 60332-3-22/IEC 60754-1/2/IEC 61034

APPROVALS

BV Certification(33493/B0 BV)

CABLE CONSTRUCTION

Conductors: Class 2 stranded copper conductor.

Insulation: Mica tape + XLPE insulation.

Cabling Element: Pair.

Overall Screen: Al/polyester tape.

Drain Wire: Tinned copper wire.

Inner Covering: Lapped polyester tape.

Armour: Copper wire braid.

Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

COLOUR CODE

Pair: White/blue with printed pair number and core number.

PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations: $6 \times OD$

Temperature Range: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$

DIMENSION AND PARAMETERS



Caledonian

IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
No.×mm ²	mm	mm	mm	kg/km
3x2x0.75	0.5	1.3	14.8	260