



# Caledonian



IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## BI (c)/ BU(c) (MRE-M2X(St)H) 150/250V Mica Tape + XLPE Insulated, LSOH (SHF1) Sheathed, Overall Screened Fire Resistant Instrumentation & Control Cables 37T0.75

MRE-M2X(St)H-37T0.75

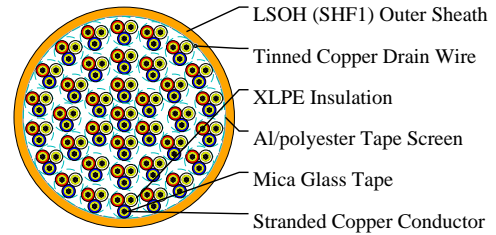

### APPLICATIONS

These cables are used on board of ships in all locations for fixed installations not subject to mechanical risk complying with IEC standards 60092-352 in safety circuit, where fire resistance is required. These cables are fire resistant, flame retardant, low smoke & halogen free, suitable for installations on passenger ships, as on other commercial vessels.

### STANDARDS

IEC 60092-350/360/376/IEC 60331-21/IEC 60332-1  
IEC 60332-3-22/IEC 60754-1/2/IEC 61034

### CABLE CONSTRUCTION

- Conductors: Class 2 stranded copper conductor.
- Insulation: Mica tape + XLPE.
- Cabling Element: Triple.
- Overall Screen: Al/polyester tape.
- Drain Wire: Tinned copper wire.
- Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

### COLOUR CODE

Triple: White/blue/red with printed triple number.

### PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations: 6×OD (OD>25mm); 4×OD (OD ≤25mm)  
Temperature Range: -30°C ~ +80°C

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
No.×mm <sup>2</sup>	mm	mm	mm	kg/km



# Caledonian

IEC60092 Offshore & Marine Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

37x3x0.75	0.5	2.3	42.7	2000
-----------	-----	-----	------	------