





# Caledonian

Industrial Cables (Harmonized code)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H05V-U

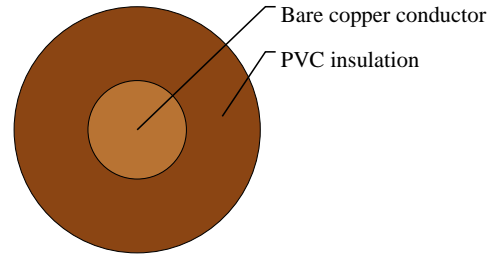

## APPLICATIONS

These insulated wires are determined for the installation to the inside of apparatus as well as for the protective laying to the lightings, in dry rooms, in production facilities, switch and distributor boards, in tubes, under and surface mounting of plasters.

## STANDARDS

<HAR> HD 21.3 S3

VDE-0281 Part-3

CEI 20-20/3

CE Low Voltage Directive 73/23/EEC and 93/68/EEC

ROHS compliant

## VOLTAGE RATING

300/500V

## CABLE CONSTRUCTION

- Solid bare copper single wire
- Solid to DIN VDE 0295 cl-1 and IEC 60228 cl-1
- Special PVC T11 core insulation
- Cores to VDE-0293 colors on chart

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE-0293

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000V
- Flexing bending radius: 15 x Ø
- Static bending radius: 15 x Ø
- Flexing temperature: -5° C to +70° C
- Static temperature: -30° C to +90° C
- Short circuit temperature: +160° C



# Caledonian

Industrial Cables (Harmonized code)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Flame retardant: IEC 60332.1
- Insulation resistance: 10 MΩ x km

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	kg/km	kg/km
1 x 0.5	20	0.6	2.1	4.8	9