




# Caledonian

BS 6883&BS 7917 Caledonian Offshore & Marine Cables LV Fire Resistant Power & Control Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## 0.6/1kV HF-EPR Insulated, SW2/SW4 Sheathed Unarmoured Fire Resistant Power & Control Cables 1C240.0

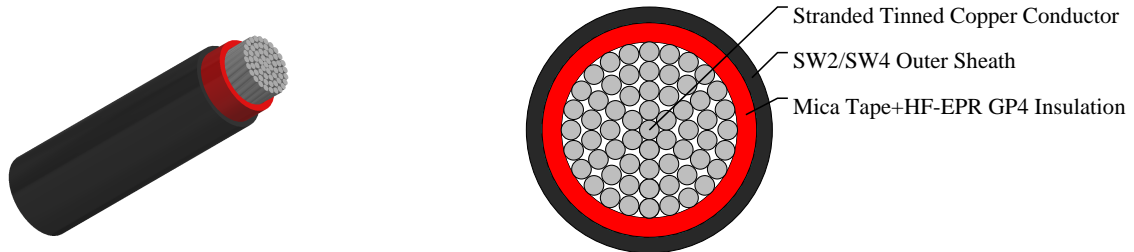

### APPLICATIONS

These fire resistant elastomeric insulated cables are designed for fixed wiring in ships and on mobile offshore units, suitable for use in power and control applications where fire integrity is essential.

### STANDARDS

BS 7917

IEC 60331-31 Fire resistant

IEC 60332-3A Flame retardant

IEC 60754-1; IEC 60754-2 Corrosivity

IEC 61034-2 Smoke density

Cold bend and impact (-40°C) (on request)

CSA C22.2 No. 38-95 (on request)

### VOLTAGE RATING

0.6/1kV

### CABLE CONSTRUCTION

Conductor: Tinned copper wire stranded circular cl. 2 BS 6360/IEC 60228.

Insulation: Mica tape + HF-EPR GP4 according to BS 7655 1.2.

Sheath: Halogen free thermosetting compound SW4 according to BS 7655 2.6 or reduced halogen thermosetting compound SW2 according to BS 7655 2.6.

### PHYSICAL AND THERMAL PROPERTIES

Temperature Range: -40°C ~ +90°C

### MECHANICAL PROPERTIES

Minimum Internal Bending Radius: 6×OD (OD>25mm); 4×OD (OD ≤25mm)

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
--	------------------------------	--------------------------	-------------------------	-------------------------	----------------



## Caledonian

BS 6883&BS 7917 Caledonian Offshore & Marine Cables LV Fire Resistant  
Power & Control Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

No. x mm <sup>2</sup>	mm	mm	mm	mm	kg/km
1x240	2.2	1.8	27.5	30.3	3120