




# Caledonian

NEK606 Offshore & Marine Cables Fire Resistant Power and Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## P105 (Formerly P5 or P5/P12) BFOU 0.6/1KV

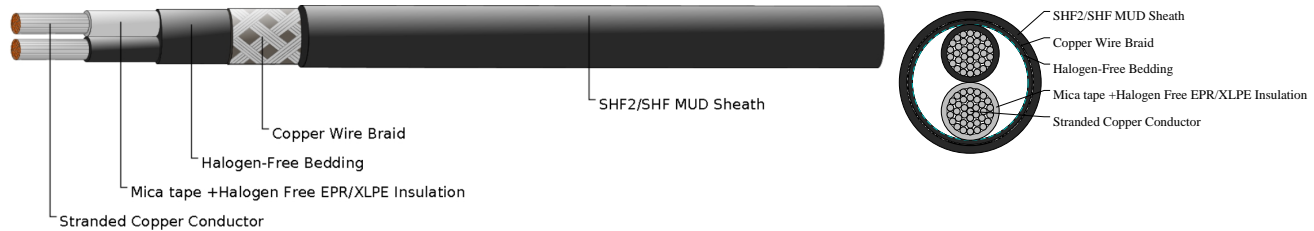

### APPLICATIONS

These cables are flame retardant, low smoke, halogen free and mud resistant, used for control, power and lighting systems.

### STANDARDS

IEC 60092-353

IEC 60092-360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1,2

IEC 61034-1,2

NEK 606:2016

IEC 60331-21

### VOLTAGE RATING

0.6/1KV

### CABLE CONSTRUCTION

Conductors: Tinned annealed stranded compacted copper to IEC 60228 class 2 or class 5.

Insulation: Mica tape + Halogen free EPR/Mica tape + XLPE.

Bedding: Halogen free compound.

Armour: Tinned copper wire braid in accordance with IEC 60092-350.

Outer Sheath: Halogen free thermosetting compound, SHF2 (for formerly TYPE P5). Halogen free, mud resistant thermosetting compound, SHF MUD (for formerly TYPE P5/P12), coloured black.

### MECHANICAL PROPERTIES

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

### TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Continuous Current Rating @45°C 2 Core	Short Circuit Current 1s
mm <sup>2</sup>	mm	Ohm/km	A	A



## Caledonian

NEK606 Offshore & Marine Cables Fire Resistant Power and Control Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

150.0	15.1	0.126	331	21460
-------	------	-------	-----	-------

### DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Approx. Overall Diameter	Nominal Copper Weight
No. × mm <sup>2</sup>	mm	mm	mm	mm	kg/km
2×150	1.8	1.4	2.6	49.7	5670