




# Caledonian

NEK606 Caledonian Offshore & Marine Cables Medium Voltage Power Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## P102 (Formerly P2 or P2/P9) RFOU/TFOU 3.6/6KV

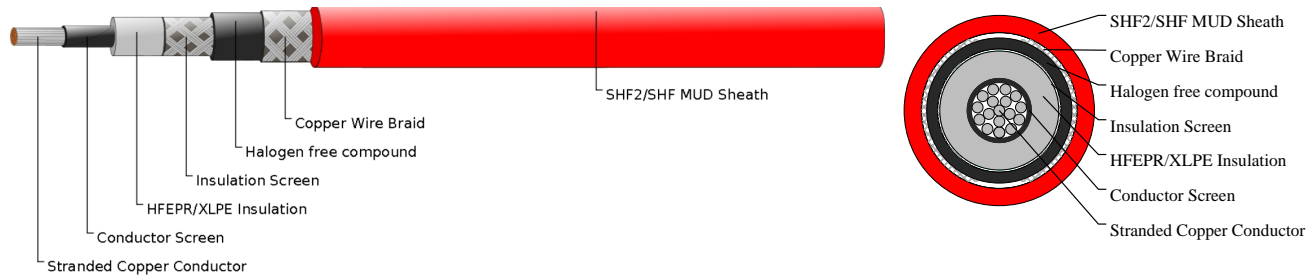

## APPLICATIONS

These cables are flame retardant, low smoke, halogen free and mud resistant, used for fixed installation for medium voltage power.

## STANDARDS

IEC 60092-354  
IEC 60092-351  
IEC 60092-359  
IEC 60332-1  
IEC 60332-3-22  
IEC 60754-1,2  
IEC 61034-1,2  
NEK 606:2004

## VOLTAGE RATING

3.6/6KV

## CABLE CONSTRUCTION

Conductors: Circular tinned annealed stranded copper to IEC 60228 class 2.

Conductor Screen: Semi conducting material.

Insulation: Halogen-free EPR. XLPE can be offered as an option (for TFOU cable).

Insulation Screen: Semi conducting material and tinned copper wire braid.

Bedding: Halogen free compound.

Armour: Tinned copper wire braid.

Outer Sheath: Halogen free thermosetting compound, SHF2 (for TYPE P2), or halogen free mud resistant thermosetting compound, SHF MUD (for TYPE P2/P9), coloured red.

## MECHANICAL PROPERTIES

Bending Radius: 15×OD (during installation); 9×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

## TECHNICAL CHARACTERISTICS



## Caledonian

### NEK606 Caledonian Offshore & Marine Cables Medium Voltage Power Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Continuous Current Rating @45°C 1 Core	Short Circuit Current 1s
mm <sup>2</sup>	mm	Ohm/km	A	A
16	5.1	1.16	96	2290

#### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Approx. Overall Diameter	Nominal Copper Weight
No.×mm <sup>2</sup>	mm	mm	mm	mm	kg/km
1×16	2.5	1.0	1.6	22.8	780