



Caledonian


Rolling Stock Cables to French Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

FIREROL Thin Wall Multicore Screened Cables With Standard Wall Sheath

NF F 63-808 (FRF-TW-025M-OS)

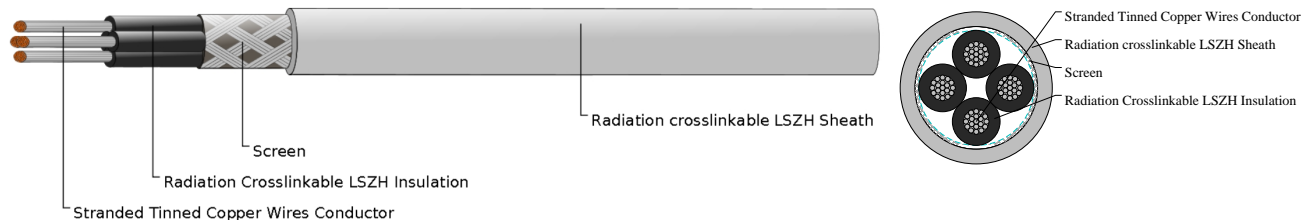

APPLICATIONS

These cables are used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor, suitable for use in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

VOLTAGE RATING

250V

CABLE CONSTRUCTION

- Conductor: Stranded tinned copper wires
- Insulation: Radiation crosslinkable LSZH compound
- Screen: Tinned copper braid
- Sheath: Radiation crosslinkable LSZH compound

Electrical Properties

- Max. Conductor Temperature: 105 °C/125 °C
- Temperature Range: -40 °C~+105 °C
- Bending Radius: 5 × Overall Diameter

FIRE PERFORMANCE FOR ROLLING STOCK APPLICATION

- NF F 63-808
- NF F 16-101
- BS 6853
- DIN 5510
- EN45545-2

FIRE PERFORMANCE IN GENERAL

| | |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------|
| EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2) | Vertical flame propagation for a single insulated wire or cable |
| EN 50266-2-4 + EN 50305; IEC 60332-3-24; NF C 32-070 2.2 (C1); VDE 0472 Teil 804 | Vertical flame spread of vertically mounted bunched wires or cables |
| EN 50268-2; IEC 61034-2; NF C 32-073 ;NF C 20-902; NF F 16 101; VDE 0472 Teil 816 | Low Smoke Emission |



Caledonian

Rolling Stock Cables to French Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

| | |
|-------------------------------------------------------------------------|-----------------------------------------------------------------|
| EN 50267-2-1; IEC 60754-1; NF C 32-074;NF C 20-454; VDE 0472 Teil 815 | Halogen Free |
| EN 50267-2-2/3; IEC 60754-2; NF C 32-074;NF C 20-453; VDE 0472 Teil 813 | Low Corrosivity (Acidity & Conductivity) |
| EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853 | Low Toxicity |
| NF F 63 808; BS6853; NF F 16 101 | Smoke Index |
| EN45545-2 | Requirement for fire behavior of materials & components R15/R16 |

DIMENSION AND PARAMETERS


| No. of Cores × Cross-sectional Area | No./Nominal Diameter of Strands | Overall Diameter (min.) | Overall Diameter (max.) | Approx. Weight |
|----------------------------------------|------------------------------------|----------------------------|----------------------------|----------------|
| No.×mm ² | no./mm | mm | mm | kg/km |
| 4×0.93 | 19/0.25 | 5.00 | 5.80 | 70.0 |



Abrasion Retardant



Acid & Alkaline Resistant



Cold Resistant



Corona Resistant



Fire Retardant
NF C32-070.2.2(C1)
IEC60332-3-24/EN50266-2-4



Flame Retardant
NF C32-070.2.1(C2)
IEC60332-1-2/EN50265-2-1



Highly Flexible



IRM 902
Mineral Oil Resistant



IRM 903
Fuel Oil Resistant




Low Corrosivity
IEC60754-2/EN50267-2-2/3
NF C32-074/NF C20-453



Low Smoke Emission
IEC 61034-2-1/EN 50268-2
NF C32-073/NF C 20-902




Low Toxicity
EN 50305; NF X70-100/NF
F63 808/TM1-04/BS 6853




Ozone Resistant



Resistance To
Soldering Heat



UV Resistant



Zero Halogen
IEC 60754-1/EN 50267-2-1
NF C20-454