





# Caledonian

Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## AVUHSF 1C50

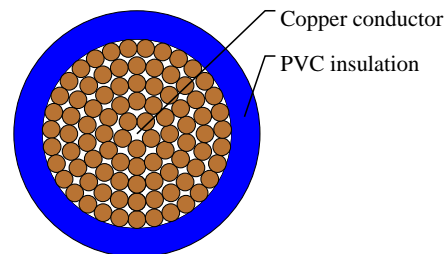

## APPLICATIONS

This PVC insulated single-core cable is used in low voltage circuits in automobiles(Battery Cable)

## STANDARDS

ES SPEC

## CABLE CONSTRUCTION

Conductor: Annealed stranded copper

Insulation: Polyvinyl Chloride(PVC)

Standard Compliance: ES SPEC

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +135°C

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x50	19/19/0.18	10	1.5	13	13.4	535	0.39