




# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## FTG10 (O)M1 2C2.5

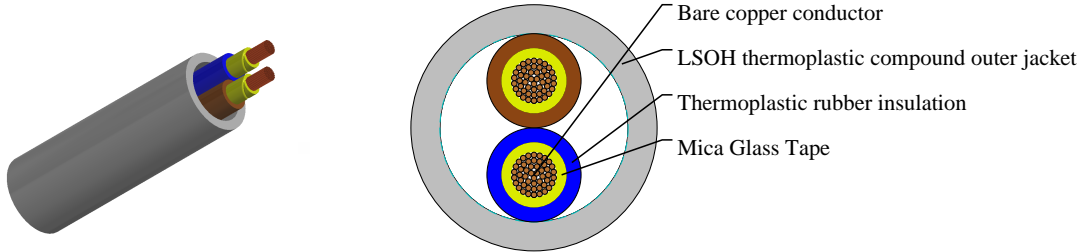

### APPLICATIONS

These cables are for all those safety systems which, of necessity, must continue to operate even when a fire is in progress. In particular, suitable for smoke detection systems, fire-extinguishing systems, power supply to escalator and automatic doors, power supply to emergency lighting, alarm systems, ventilation plants, etc. Indoor and outdoor fixed laying on wall and racks.

### STANDARDS

EN 50200, CEI 20-11, CEI 20-22 III

CEI 20-29, CEI 20-35, CEI 20-36

CEI 20-37, CEI 20-45, UNEL 00722

### VOLTAGE RATING

600/1000 V

### CABLE CONSTRUCTION

- Flexible bare copper conductor to CEI 20-29 cl.5
- Glass/mica tape
- G10 quality thermoplastic rubber insulation to CEI 20-11
- Type M1 thermoplastic LSOH compound outer jacket

### COLOUR CODE

Insulation Colour Code

Color coded to VDE 0293-308

2 cores - Brown + Blue

### PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 4000 V
- Minimum bending radius: 14 x Ø
- Flexing temperature: -5° C to +90° C
- Static temperature: -25° C to +90° C
- Maximum short circuit temperature: +250° C
- Flame retardant: CEI 20-22 III - IEC 60332-3-24
- Fire resistant: CEI 20-36 - IEC60331



# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Insulation resistance: 10 MΩ x km

## DIMENSION AND PARAMETERS

| No. of Cores<br>× Cross-<br>sectional Area | AWG Size  | Nominal<br>Insulation<br>Thickness | Nominal Sheath<br>Thickness | Approx. Overall<br>Diameter | Approx. Weight |
|--|-----------|------------------------------------|-----------------------------|-----------------------------|----------------|
| No. × mm <sup>2</sup>                      |           | mm                                 | mm                          | mm                          | kg/km          |
| 2x2.5                                      | 14(50/30) | 1                                  | 1.8                         | 14.4                        | 270            |