





## Caledonian

Industrial Cables (Australian Standard Low Voltage)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

### XLPE Insulated, PVC Sheathed 2 core+E Unarmored Cables, 0.6/1kV

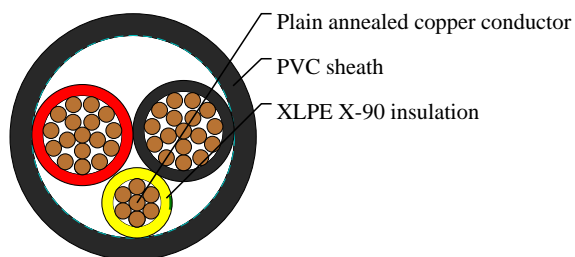

### APPLICATIONS

These cables are used for mains, submains and subcircuits unenclosed, enclosed in conduit, buried direct or in underground ducts for buildings and industrial plants where not subject to mechanical damage.

### STANDARDS

AS/NZS 5000.1

AS/NZS 3008

AS/NZS 1125

### APPROVALS

SAA Certification (SAA-173128-EA)

### VOLTAGE RATING

0.6/1kV

### CABLE CONSTRUCTION

Conductor: Plain annealed copper.

Insulation: XLPE X-90.

Sheath: Polyvinylchloride compound PVC 5V-90

### COLOUR CODE

Insulation colour: Red, Black, Green/yellow

Sheath colour: Black, other colors are available upon request

### TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Current Ratings (Unenclosed In Air)	Current Ratings (Buried Direct)	Current Ratings (Buried In Ducts)	Maximum DC Resistance @20°C	Maximum AC Resistance @90°C	Reactance	Single Phase Voltage Drop @90°C
mm <sup>2</sup>	A	A	A	Ohm/km	Ohm/km	Ohm/km	mV/A/m
16	107	139	107	1.51	1.47	0.081	2.95



## Caledonian

Industrial Cables (Australian Standard Low Voltage)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

### DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	No./Nominal Diameter of Strands	Nominal Earth Conductor Area	Nominal Insulation Thickness	Nominal Insulation Thickness (Earth)	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight
mm <sup>2</sup>	no./mm	mm <sup>2</sup>	mm	mm	mm	mm	kg/km
16	7/1.70	6	0.7	0.7	1.4	16.6	520