





Caledonian

Industrial Cables (German Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

H07V-R

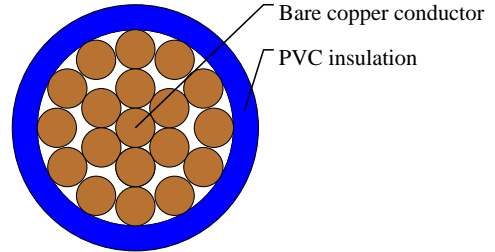

APPLICATIONS

These cables are preferably for installation indoors, in cable ducts and in industrial plants or switching stations, under ground installation. Can be used in switchboards and distributor boards or where a thicker strand of multi-wire is required. Found in electronic and electrical equipment and switchgear cabinets designed for export to a European country and for MRO replacement of European made equipment wire.

STANDARDS

HD 21.3 S3

VDE-0281 Part-3

VOLTAGE RATING

450/750V

CABLE CONSTRUCTION

- Bare copper solid/strands conductor
- Strands to VDE-0295 Class-2, IEC 60228 CI-2
- Special PVC T11 core insulation

COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2500 volts
- Flexing bending radius: $15 \times \varnothing$
- Static bending radius: $15 \times \varnothing$
- Flexing temperature: -5°C to $+70^{\circ} \text{C}$
- Static temperature: -30°C to $+80^{\circ} \text{C}$
- Short circuit temperature: $+160^{\circ} \text{C}$
- Flame retardant: IEC 60332.1
- Insulation resistance: $10 \text{ M}\Omega \times \text{km}$

DIMENSION AND PARAMETERS



Caledonian

Industrial Cables (German Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No.×mm ²		mm	mm	kg/km	kg/km
1 x 95	3/0(19/10)	1.6	14.7	912	930