





# Caledonian

JIS Code Power & Control Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## CVV-I/C AMS 8P1.5

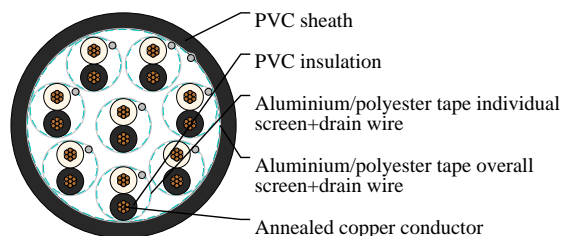

## APPLICATIONS

Used for electric signal transmission of control or monitoring circuits for 0.6/1kV.

## CABLE CONSTRUCTION

Conductor: Stranded annealed copper wires

Insulation: Polyvinyl chloride (PVC)

Pairing: Two insulated conductors uniformly twisted together

Individual Screen: Aluminium/polyester tape is applied over each pair metallic side down in contact with tinned copper drain wire.

Filler: Non-hygroscopic material(optional)

Binding tape: Polyester (Mylar) tape (optional)

Overall Screen: Aluminium/polyester tape is applied over each pair metallic side down in contact with tinned copper drain wire.

Sheath: Polyvinyl chloride (PVC), Black color (other colors can be provided upon request)

## COLOUR CODE

Black and white with marking numbers

## PHYSICAL AND THERMAL PROPERTIES

Maximum conductor temperature 70°C

Circuit voltage not exceeding 600 volts

Test voltage: 3500 volts

## DIMENSION AND PARAMETERS

No. of Pairs	Nominal Cross-sectional Area	No. and Dia. of Wires	Conductor Diameter	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight	Max. DC Resistance at 20°C
	mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	Ω/km
8	1.5	7/0.53	1.59	0.8	1.8	24.5	720	12.34