





## Caledonian

JIS Code Power & Control Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

### CVVAMS 3C4

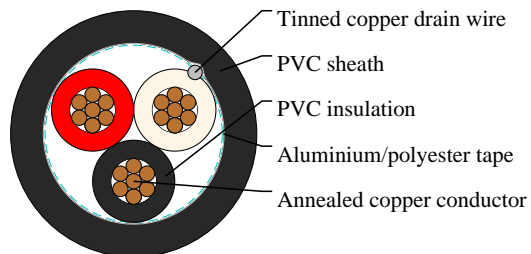

### APPLICATIONS

Used for electric signal transmission of control or monitoring circuits for 0.6/1kV

### STANDARDS

IEC 60502-1

### CABLE CONSTRUCTION

Conductor: Stranded annealed copper wires

Insulation: Polyvinyl chloride (PVC)

Filler: Non-hygroscopic material(optional)

Binding tape: Polyester (Mylar) tape (optional)

Overall Screen 1: Aluminium/polyester tape is applied over each pair metallic side down in contact with tinned copper drain wire.

Sheath: Polyvinyl chloride (PVC), Black color (other colors can be provided upn request)

### COLOUR CODE

3 cores- Black, white and red

### PHYSICAL AND THERMAL PROPERTIES

Maximum conductor temperature 70°C

Circuit voltage not exceeding 600 volts

Test voltage 3500 volts

### DIMENSION AND PARAMETERS

| No. of Cores | Nominal Cross-sectional Area | No. and Dia. of Wires | Conductor Diameter | Nominal Insulation Thickness | Nominal Sheath Thickness | Approx. Overall Diameter | Approx. Weight | Max. DC Resistance at 20°C |
|--------------|------------------------------|-----------------------|--------------------|------------------------------|--------------------------|--------------------------|----------------|----------------------------|
|              | mm <sup>2</sup>              | no./mm                | mm                 | mm                           | mm                       | mm                       | kg/km          | Ω/km                       |
| 3            | 4                            | 7/0.85                | 2.55               | 1                            | 1.8                      | 15.5                     | 330            | 4.61                       |