



Caledonian



Mining Cables (VDE Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

Cables for Underground Mining

H07RN8-F 450/750V Harmonized Rubber Cables 24G1.5

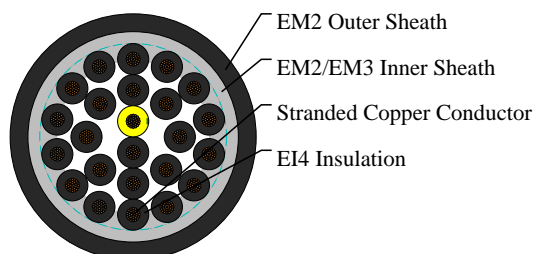

APPLICATIONS

These cables are designed for use in submersible pumps and similar applications in water for industrial use up to a water depth of 10 m and water temperature-ranges up to 40°C, also approved for dry, humid and wet applications.

STANDARDS

DIN VDE 0282 Part1 and Part 16

HD 22.1/HD 22.16 S1

VOLTAGE RATING

450/750V

CABLE CONSTRUCTION

Conductors: Stranded copper conductor, class 5 according to DIN VDE 0295/IEC 60228.

Insulation: Rubber type EI4 according to DIN VDE 0282 Part 16.

Inner Sheath : Rubber type EM2/EM3 according to DIN VDE 0282 Part 16.

Outer Sheath: Rubber type EM2 according to DIN VDE 0282 Part 16.

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
No. ×mm ²	mm	mm	mm	mm	mm	kg/km
24G1.5	0.8	1.4	2.1	24.3	28.5	920