



Caledonian



Mining Cables (VDE Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

Cables for Open-cast Mining

NTMCW0EU Flexible Medium Voltage Single Core Cable 1×35/16

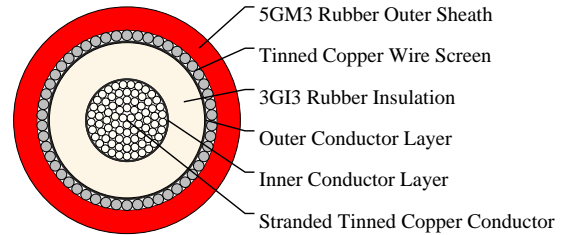

APPLICATIONS

These cables are used for connection in switch-gear and for connection of mobile transformer substations to the overhead line.

STANDARDS

VDE 0250 Part 813

VOLTAGE RATING

6/10kV

CABLE CONSTRUCTION

Conductors: Flexible stranded tinned copper conductor, class 5 according to DIN VDE 0295.

Inner Conductor Layer: Special conductive rubber.

Insulation: EPR type 3GI3.

Outer Conductor Layer: Special conductive rubber.

Screen: Spiral of tinned copper wires.

Outer Sheath: PCP type 5GM3.

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Outer Sheath Thickness	Nom. Overall Diameter	Approx. Weight
No. × mm ²	mm	mm	mm	kg/km
1×35/16	3.4	2.2	24.5	1040