



# Caledonian



Mining Cables (AS\_NZS Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## AS/NZS 1802:2003 Reeling & Trailing Cables

Type 209 11KV 3C185

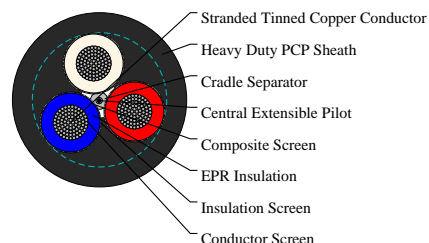

## APPLICATIONS

Type 209 series cable is mainly used as a flexible feeder to machinery, more suitable as a trailing cable rather than for reeling. Smaller cables are used for drills and hand held tools and equipment.

## STANDARDS

AS/NZS 1802:2003

AS/NZS 1125

AS/NZS 3808

AS/NZS 5000.1

## CABLE CONSTRUCTION

3×Conductors: Flexible stranded tinned annealed copper conductor.

Conductor Screen: Semiconductive compound (for cables having a voltage rating of 3.3/3.3kV and above).

Insulation: EPR.

Insulation Screen: Semiconductive elastomer.

Composite Screen (earth conductor): Tinned annealed copper braiding interwoven with polyester yarn.

Cradle Separator: Semiconductive PCP.

1×Central Extensible Pilot: EPR covered flexible stranded tinned copper conductor.

Sheath: Heavy duty PCP sheath. Heavy duty CPE/CSP sheath can be offered upon request.

## COLOUR CODE

Type 209: Red, White, Blue

## DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	No./ Nominal Diameter of Strands	Core Screen Strand Size	Core Screen Area of Screen	Pilot Conductor Strand Size	Pilot Conductor Thickness of Covering	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
mm <sup>2</sup>	no./mm	no./mm	mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km
185	518/0.67	7/0.4	57.2	40/0.2	0.8	7.6	10.7	108.8	1830