




Caledonian

NEK606 Caledonian Offshore & Marine Cables Medium Voltage Power Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

P113 RFOU 18/30 (36)kV

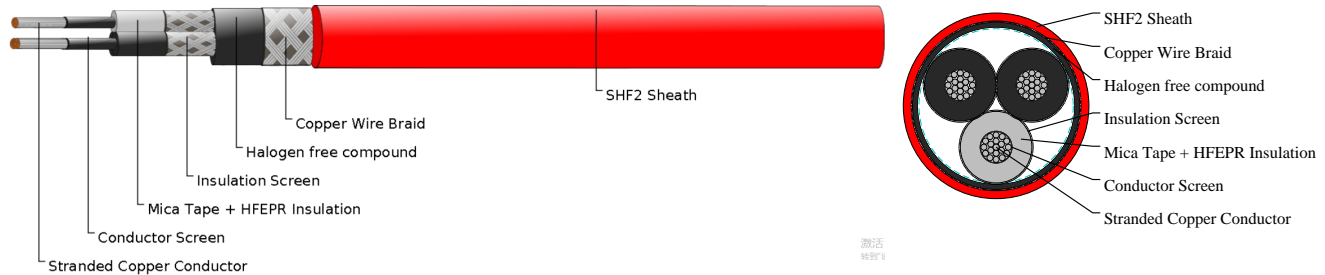

APPLICATIONS

These cables are flame retardant, low smoke, halogen free and mud resistant, used for fixed installation for medium voltage power.

STANDARDS

IEC 60092-354
IEC 60092-351
IEC 60092-359
IEC 60332-1
IEC 60332-3-22
IEC 60754-1,2
IEC 61034-1,2
NEK 606:2004

VOLTAGE RATING

18/30

CABLE CONSTRUCTION

Conductors: Circular tinned annealed stranded copper to IEC 60228 class 2 or class 5.

Conductor Screen: Semi conducting material.

Insulation: Halogen-free EPR. XLPE can be offered as an option (for TFOU cable).

Insulation Screen: Semi conducting material and tinned copper wire braid.

Bedding: Halogen free compound.

Armour: Tinned copper wire braid in accordance with IEC 60092-350.

Outer Sheath: Halogen free thermosetting compound, SHF2 ,coloured red.

MECHANICAL PROPERTIES

Bending Radius: 15×OD (during installation); 9×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

TECHNICAL CHARACTERISTICS



Caledonian

NEK606 Caledonian Offshore & Marine Cables Medium Voltage Power Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Continuous Current Rating @45°C 3/4 Core	Short Circuit Current 1s
mm ²	mm	Ohm/km	A	A
95	12.2	0.195	205	13590

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Diameter under Armour	Approx. Overall Diameter	Nominal Copper Weight
No. × mm ²	mm	mm	mm	kg/km
3×95	8.0	78.1	89	9790