



Caledonian


NEK606 Water Blocked Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Instrumentation Cables

Water Blocked S1 or S1/S5 RFOU(i) 250V 20x2x0.75

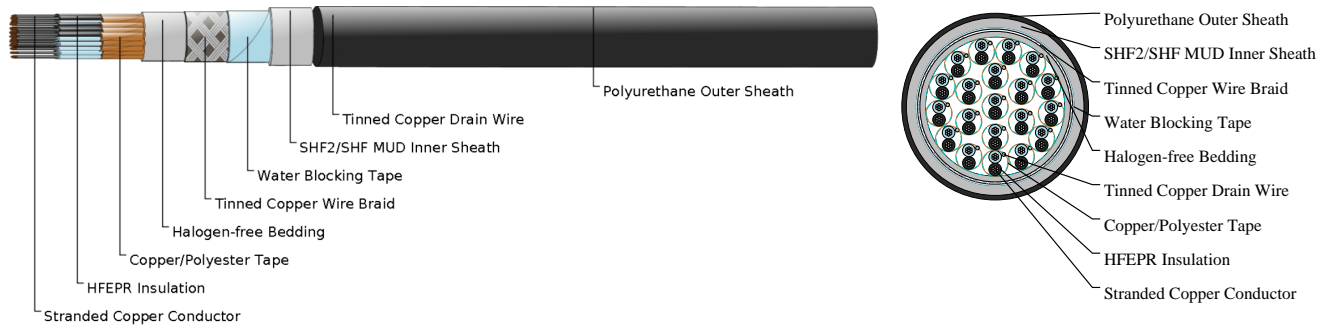

APPLICATIONS

These cables are partially water blocked, flame retardant, low smoke, halogen free and mud resistant, used for instrumentation, communication, control and alarm systems.

STANDARDS

IEC 60092-376

IEC 60092-360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1,2

IEC 61034-1,2

NEK 606

VG 95218 part 29

VOLTAGE RATING

250V

CABLE CONSTRUCTION

Conductors: Circular tinned annealed stranded copper wire to IEC 60228 class 2.

Insulation: Halogen free EPR compound.

Twining: Colour coded cores twisted together.

Filler: Water blocking fillers, if required.

Individual Shielding: Each pairs/triples are screened by copper backed polyester tape in contact with a stranded tinned copper drain wire and wrapped with polyester tape. Pairs/triples are numbered with numbered tape or by numbers printed directly on the insulated conductors.

Filler: Water blocking fillers, if required.

Bedding: Halogen free compound, PETP wrapping tape will be applied over the bedding, if required.

Armour: Tinned copper wire braid, PETP wrapping tape will be applied over the braiding, if required.

Water Blocking Elements: Water blocking tape and strings for providing longitudinal water tightness.



Caledonian

NEK606 Water Blocked Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Inner Sheath: Halogen free thermosetting compound, SHF2 (for TYPE S1). Halogen free MUD resistant thermosetting compound, SHF MUD (for TYPE S1/S5), coloured grey (blue for intrinsically safe).

Outer Sheath: Polyurethane for providing transversal water tightness, PE is optional, but can not meet low smoke standard.

PHYSICAL AND THERMAL PROPERTIES

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

TECHNICAL CHARACTERISTICS


| Nom. Cross-Section Area | Nom. Conductor Diameter | Maximum Resistance @20°C | Mutual Capacitance | Nominal Inductance @ 1KHz | Maximum L/R @ 1KHz |
|-------------------------|-------------------------|--------------------------|--------------------|---------------------------|--------------------|
| mm ² | mm | Ohm/km | nF/km | MH/km | μH/Ω |
| 0.75 | 1.1 | 26.3 | 90 | 0.686 | 20 |

DIMENSION AND PARAMETERS

| Construction No. of elements×No. of cores in element×Cross section | Nominal Insulation Thickness | Nominal Bedding Thickness | Nominal Inner Sheath Thickness | Nominal Outer Sheath Thickness | Nom. Overall Diameter | Cable Weight |
|--|------------------------------|---------------------------|--------------------------------|--------------------------------|-----------------------|--------------|
| mm ² | mm | mm | mm | mm | mm | kg/km |
| 20x2x0.75 | 0.6 | 1.1 | 1.7 | 1 | 32.1±2 | 1491 |



Flame Retardant
IEC 60332-1



Halogen Free
IEC 60754-1



Low Corrosivity
IEC 60754-2



Low Smoke Emission
IEC 61034-2



Reduced Fire Propagation
IEC 60332-3-22