





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## CIVUS 1C1.25

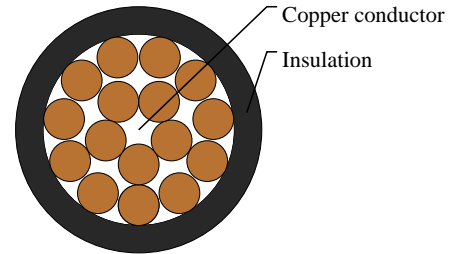

## APPLICATIONS

This PVC insulated single-core cable is used in low voltage circuits in automobiles

## STANDARDS

JASO D611

## CABLE CONSTRUCTION

Conductor: Annealed stranded copper or copper alloy

Insulation: Polyvinyl Chloride(PVC)

Standard Compliance: JASO D611

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +85°C

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x1.25	7/SB	1.40	0.2	1.8	2.0	12.4	14.9