





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FLALRY

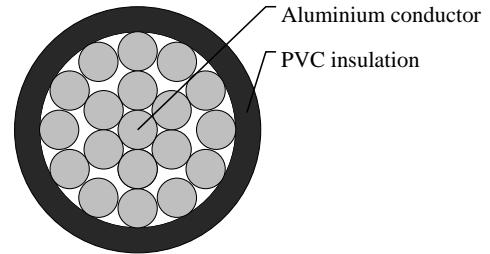

## APPLICATIONS

This PVC insulated automotive cable is designed for telecommunication overhead contract line and electronics.

## STANDARDS

ISO 6722 Class B

## CABLE CONSTRUCTION

Conductor:

Aluminium 99.7% ≥ 1.25 mm<sup>2</sup>

Aluminium alloy < 1.25 mm<sup>2</sup>

Insulation: PVC

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to +105°C

Cables with cross-sections > 10 mm<sup>2</sup> can be used as battery cables

Considerable weight savings compared to copper

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./Nominal Diameter of Strands	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1x2.5	19/0.43	2.2	0.28	2.7	3.0	12	12.7