



Caledonian



FIREGUARD Flame Retardant Power & Control Cables

www.caledonian-cables.co.uk

sales@caledonian-cables.co.uk

600/1000V PVC Insulated, PVC Sheathed, Armoured Power Cables to IEC 60502 (Single Core)

FGD300 1VVMAV-R (CU/PVC/PVC/AWA/PVC 600/1000V Class 2)

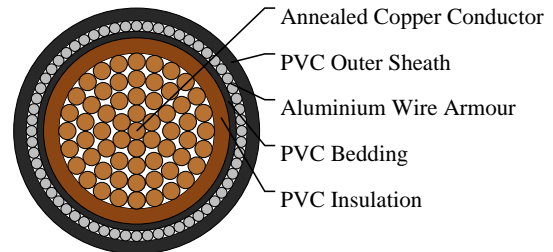

APPLICATIONS

The cables are mainly used in power stations, mass transit underground passenger systems, airports, petrochemical plants, hotels, hospitals, and high-rise buildings.

STANDARDS

Basic design to IEC 60502-1

APPROVALS

Approvals:

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	IEC 60332-1
--	-------------

VOLTAGE RATING

600/1000V

CABLE CONSTRUCTION

Conductor: Annealed copper wire, stranded according to BS EN 60228 class 2.

Insulation: PVC/A according to IEC 60502-1.

Inner Covering: Extruded PVC or polymeric compound.

Armouring: Aluminium wire

Outer Sheath: Extruded PVC Type ST1/ST2 according to IEC 60502-1.

Outer Sheath Option: UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3 UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

COLOUR CODE

Insulation Colour: Brown or blue, Other colours can be offered upon request.

Sheath Colour: Black, other colours can be offered upon request.

PHYSICAL AND THERMAL PROPERTIES



Caledonian

FIREGUARD Flame Retardant Power & Control Cables

www.caledonian-cables.co.uk

sales@caledonian-cables.co.uk

Maximum temperature range during operation (PVC): 70°C

Maximum short circuit temperature (5 Seconds): 160°C(<300 mm²); 140°C(>300 mm²)


Minimum bending radius:

Circular copper conductors: 6 x Overall Diameter

Shaped copper conductors: 8 x Overall Diameter

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	Conductor Class	Nominal Insulation Thickness	Nominal Bedding Thickness	Nominal Sheath Thickness	Nominal Aluminum Wire Armour Diameter	Overall Diameter (max.)	Approx. Weight
No. x mm ²		mm	mm	mm	mm	mm	kg/km
1x500	2	2.8	1.2	2.3	2	41.8	6583



Rated voltage



Flame Retardancy
IEC 60332-1



IEC60502-1