



Caledonian

FIREGUARD Flame Retardant Power & Control Cables



www.caledonian-cables.com

marketing@caledonian-cables.com

600/1000V XLPE Insulated, PVC Sheathed, Unarmoured Power Cables to IEC 60502 (2-5 Cores & Multicore)

FGD400 1RV-R (CU/XLPE/PVC 600/1000V Class 2)

VDE Code: N2XY

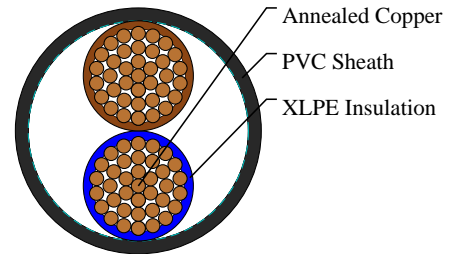

APPLICATIONS

The cables are mainly use in fixed installations in industrial areas, buildings and similar applications but not for burial in the ground, either directly or in ducts.

STANDARDS

Basic design to BS 7889:2012

APPROVALS

TUV Certification (Z1 17 08 98200 008)

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	BS EN 60332-1-2
--	-----------------

VOLTAGE RATING

600/1000V

CABLE CONSTRUCTION

Conductor: Annealed copper wire, stranded according to BS EN 60228 class 2.

Insulation: XLPE type GP8 according to BS 7655-1.3.

Filling: If necessary, the formation of a compact and reasonably circular cable shall be achieved by one of the following methods.

- The application of synthetic fillers or binder tape(s).
- The optional inner covering.
- The sheath provided it effectively fills the interstices.
- Any combination of the above.

Inner Covering Option: The optional inner covering, where used, shall consist of an extruded layer of synthetic polymeric material. It shall surround the single core and the laid-up two, three, four or five cores, giving the assembly a practically circular shape.

Outer Sheath: PVC Type 9 according to BS 7655-4.2.



Caledonian

FIREGUARD Flame Retardant Power & Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Outer Sheath Option: UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

COLOUR CODE

Insulation Colour:

Two-core: Brown, blue

Three-core: Brown, black, grey. Alternatively, green-and-yellow, blue, brown

Four-core: Blue, brown, black, grey. Alternatively, green-and-yellow, brown, black, grey

Five-core: Green-and-yellow, blue, brown, black, grey

Note: Depending on their intended use, the cables might be subject to the core colour requirements specified in BS 7671 or other standards, or in statutory requirements.

Sheath Colour: Black, other colours can be offered upon request

PHYSICAL AND THERMAL PROPERTIES

Maximum temperature range during operation (XLPE): 90°C

Maximum short circuit temperature (5 Seconds): 250°C

Minimum bending radius:

Circular copper conductor (OD ≤ 25mm): 4 x Overall Diameter

Circular copper conductor (OD > 25mm): 6 x Overall Diameter

Shaped copper conductor: 8 x Overall Diameter

Electrical Properties

Conductor Operating Temperature: 90°C

Ambient Temperature: 30°C

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Conductor Class	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight
No. x mm ²		mm	mm	mm	kg/km
2x185	2	1.6	2.3	41.6	4329



Rated voltage



BS 7889



Flame Retardancy
EN 60332-1-2