



# Caledonian



## FIREGUARD Flame Retardant Power & Control Cables

www.caledonian-cables.co.uk

sales@caledonian-cables.co.uk

### 600/1000V XLPE Insulated, PVC Sheathed, Armoured Power Cables to IEC 60502 (4Cores)

FGD400 1RVMV-R (CU/XLPE/PVC/SWA/PVC 600/1000V Class 2)

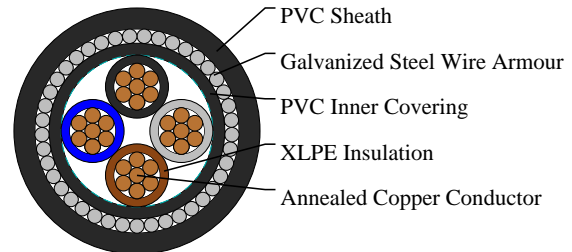

### APPLICATIONS

The cables are mainly used in power stations, mass transit underground passenger systems, airports, petrochemical plants, hotels, hospitals, and high-rise buildings. This product type is TUV approved.

### STANDARDS

Basic design adapted to IEC 60502-1

### APPROVALS

TUV Certification (Z1 17 01 98200 004)

### FIRE PERFORMANCE

|  |             |
|--|-------------|
| Flame Retardance (Single Vertical Wire Test) | IEC 60332-1 |
|--|-------------|

### VOLTAGE RATING

600/1000V

### CABLE CONSTRUCTION

Conductor: Annealed copper wire, stranded according to IEC 60228 class 2.

Insulation: XLPE according to IEC 60502-1.

Inner Covering: Extruded PVC or polymeric compound.

Armouring: Galvanized steel wire

Outer Sheath: Extruded PVC Type ST1/ST2 according to IEC 60502-1.

Outer Sheath Option: UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

### COLOUR CODE

Insulation Colour: Brown, black, grey, black.

Sheath Colour: Black, other colours can be offered upon request.

### PHYSICAL AND THERMAL PROPERTIES



# Caledonian

## FIREGUARD Flame Retardant Power & Control Cables

www.caledonian-cables.co.uk

sales@caledonian-cables.co.uk

Maximum temperature range during operation: 80°C (For ST1 Sheath); 90°C (For ST2 Sheath)

Maximum short circuit temperature (5 Seconds): 250°C

Minimum bending radius: 12 x Overall Diameter

### Electrical Properties

Conductor Operating Temperature: 90°C

Ambient Temperature: 30°C

### DIMENSION AND PARAMETERS

| No. of Cores<br>× Cross-sectional<br>Area | Conductor<br>Class | Nominal<br>Insulation<br>Thickness | Nominal<br>Thickness<br>of Inner<br>Covering | Nominal<br>Sheath<br>Thickness | Nominal<br>Steel Wire<br>Armour<br>Diameter | Overall<br>Diameter<br>(max.) | Approx.<br>Weight |
|---|--------------------|------------------------------------|--|--------------------------------|---|-------------------------------|-------------------|
| No. xmm <sup>2</sup>                      |                    | mm                                 | mm   | mm                             | mm  | mm                            | kg/km             |
| 4x10                                      | 2                  | 0.7                                | 1.0  | 1.8                            | 1.25  | 20.2                          | 1093              |



Rated voltage



Flame Retardancy  
IEC 60332-1



IEC60502-1