




# Caledonian

Submarine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## Partially Longitudinally Water Blocked Cable 3G1.5

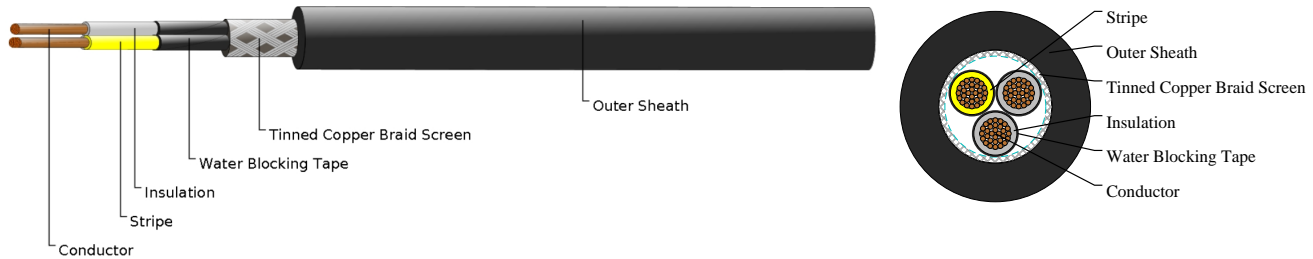

### APPLICATIONS

These outboard installation cables for naval vessels are transversally water blocked and longitudinally completely water blocked (all wires are not water blocked), designed according to VG 95218 part 29.

### VOLTAGE RATING

500V

### CABLE CONSTRUCTION

Conductor: Copper conductor, fine stranded.

Insulation: Special elastomer.

Separator: Water-blocking tapes.

Fillers: Water-blocking fillers.

Screen: Copper braid with tinned wires.

Sheath: Cross linked halogen free flame retardant compound.

### TECHNICAL CHARACTERISTICS

No. of Core × Nom. Cross-Section Area	Transfer impedance (max.)
No. × mm <sup>2</sup>	MΩ/m
3G1.5	30

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Sheath Thickness (min.)	Diameter Of Core (max.)	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
No. × mm <sup>2</sup>	mm	mm	mm	mm	kg/km
3G1.5	1.5	2.4	9.7	10.3	160